


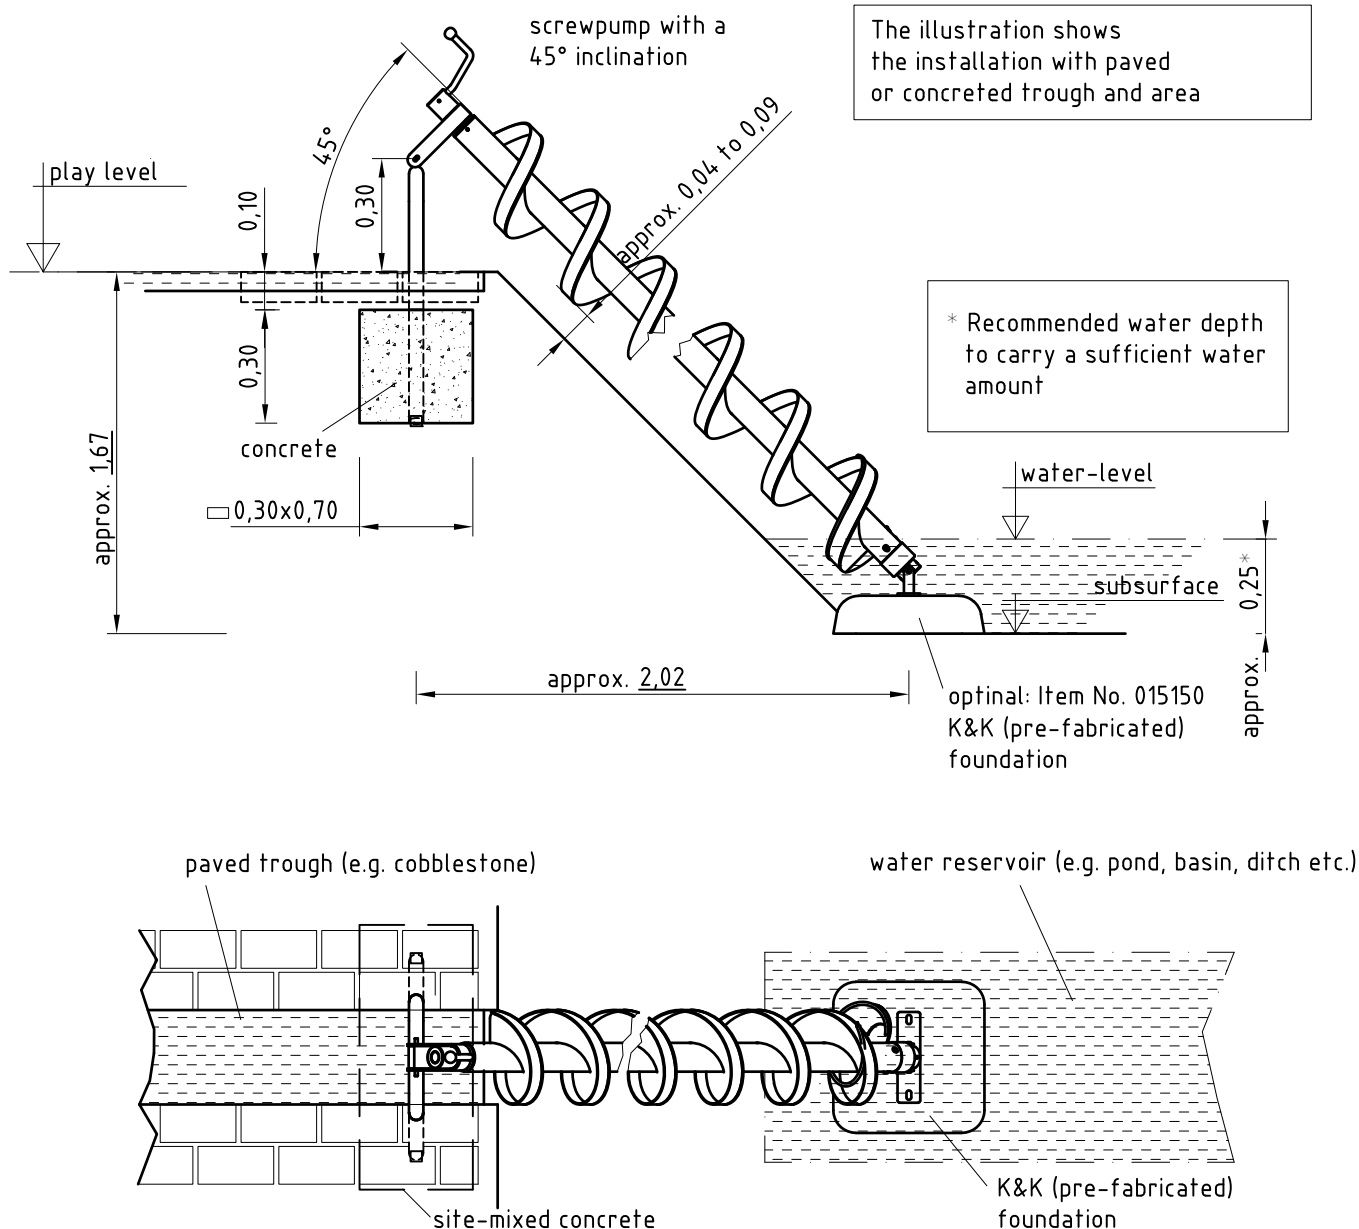

1. Assign a location for the equipment considering the (minimum) space requirements/impact area.
2. The maximum free height of fall of the arrangement depicted is less than 0,60 m. If the arrangement is modified (e.g. by moving units or adding further elements), the space requirements (and, if necessary, the area with impact attenuating surfacing acc. to AS 4685.1 / AS/NZS 4422) have to be adapted.
3. Excavate soil for foundations, according to drawing. Please note: To achieve maximum stability and a safe installation, a moderate level of soil solubility is indispensable.
4. **For installation of the pre-assembled components and/or single parts, the screws slightly have to be lubricated with installation paste! Tighten all screws after having aligned all components.**
5. Grout foundations with compressed concrete C20/25 and cover with soil or any other surfacing material (taking item No 2 into consideration).
6. Release for play after concrete foundations have set.
7. Check all screw connections according to maintenance instructions and retighten, if necessary.
8. Please take care that all special tools (e.g. Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for safety management (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the persons responsible.