

play equipment **Slide tower (3,90)**
item number **041300700**

product description (page 1)



Posts

Laminated Robinia timber Ø 120 mm with cylindrical milling. End-grain surfaces are covered by non-detachable protective stainless steel caps.

Stainless steel tubular pedestal for concrete-cast foundation and for fixed mounting to round Robinia posts, Ø 120 mm, below playing surface.

Platforms

Platforms from boards of 30 mm thickness and all-round square-shaped joists 45 x 100 mm. Dried timber from Robinia, planed, milled and free from decay. Force-fitting fastening through specific stainless steel brackets with end-to-end bolt assembly.

Attachment parts

- bowed guardrail with roll-off prevention, from stainless steel tubes, Ø 33,7 x 2 mm
- tandem guardrail from stainless steel tubes, Ø 33,7 x 2 mm
- timber infill barrier from Robinia, 125 x 30 mm, fastening between stainless steel tubes Ø 33,7 x 2 mm
- infill barrier from stainless steel tubes, Ø 33,7 x 2 / 25 x 2 mm, one-piece welded assembly
- climbing rung made from stainless steel tubes Ø 33,7 x 2 mm
- vertical handle from stainless steel tube Ø 33,7 x 2 mm, as a climbing aid
- tent roof, 45° inclination, from highly weather-resistant HPL panels, 13 mm thickness. Fastening to stainless steel frame Ø 33,7 x 2 mm
- trapezoid pent roof, 30° inclination, from highly weather-resistant coloured HPL, 13 mm thickness, fastening to a frame from stainless steel tubes Ø 33,7 x 2 mm

Tunnel hill slide

sliding sections from stainless steel, of low noise level thanks to tunnel shape, welded to a two-part slide for transport reasons, including appropriate connecting flanges to facilitate installation on site

Course: curved at 54° to the right

For your planning, due to a possible sliding surface heating, please see to a north-east orientation of the slides or provide half-shade of trees.

play equipment **Slide tower (3,90)**
item number **041300700**

product description (page 2)

Metal components: stainless steel

Robinia timber is furnished with water-repellent, breathable protective coating. Besides protection from moisture, that treatment reduces crack formation. Thanks to a specific fastening adaptor, forces arising from the modular attachment parts are directly derived into the posts. Tamper-proof screw connections thanks to screws with protective screw cap.


play equipment

Slide tower (3,90)

item number

041300700
<https://kaiser-kuehne.com/products/?lang=en>

product data

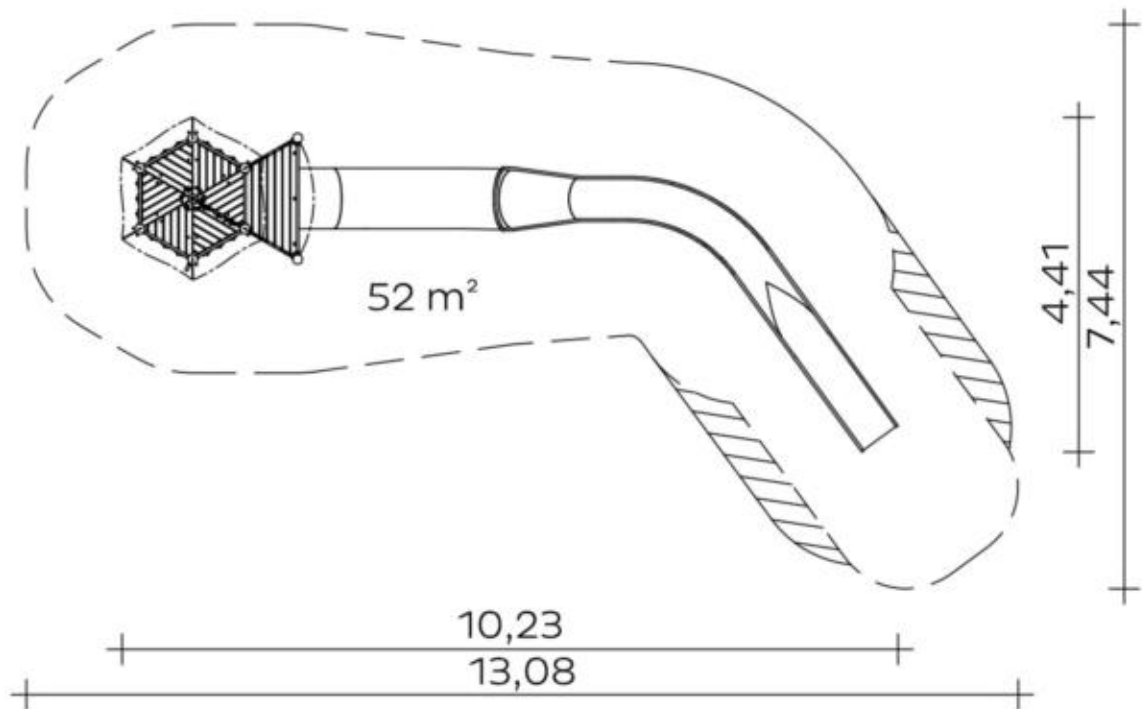

(without scale)

installation

play equipment [m]	l	10,30
	w	4,41
	h	5,40
minimum space [m]	l	13,08
	w	7,44
	h	5,40
impact area [m²]		52,00
free height of fall [m]		1,40
number of mechanics		3
assembly time [hrs]		10
lifting device		no
single weight [kg]		390
total weight [kg]		1.444

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,40	0,40	0,60	0,096	1
1,40	0,75	0,40	0,420	1
0,40	0,40	0,40	0,064	9
			1,092	11

usage

areas of use

activities

age groups

3+

number of users

10

slide heights [m]

2,50

platform heights

1,40 1,60 1,80 2,00 2,20 2,40

inclusion

Individual games



Functional play



Speed



Altitude experience



Coordination



play equipment

Slide tower (3,90)

item number

041300700

variants

17964 *Classic*

