

play equipment

Tower combination

item number

023850500
product description (page 1)


Posts

Posts made from stainless steel tubes Ø 12 cm covered by non-detachable protective stainless steel caps.

Platforms

Platforms from boards of 30 mm thickness and all-round square-shaped joists 45 x 100 mm. Dried timber from Robinia, planed, milled and free from decay. Force-fitting fastening through specific stainless steel brackets with end-to-end bolt assembly.

Attachment parts

- bowed guardrail with roll-off prevention, from stainless steel tubes, Ø 33,7 x 2 mm
- timber infill barrier from Robinia, 125 x 30 mm, fastening between stainless steel tubes Ø 33,7 x 2 mm
- infill panel from highly weather-resistant coloured HPL, fastening between stainless steel tubes Ø 33,7 x 2 mm
- climbing wall with six cut-outs from highly weather-resistant coloured HPL, 20 mm thickness, framed by stainless steel tubes
- (cranked) ladder rung made from stainless steel tubes Ø 33,7 mm
- single-sided free climbing wall (0,80) from highly weather-resistant coloured HPL, 20 mm, framed by tubular stainless steel
- vertical handle from stainless steel tube Ø 33,7 x 2 mm, as a climbing aid
- climbing net made from Hercules ropes, framed by tubular stainless steel
- bench seat 0,80 m; from highly weather-resistant coloured HPL
- spatial tunnel-shaped net made from Hercules ropes, mesh size all around 125x125 mm, framed by stainless steel
- attachment slide, width 0,60 m, with roll-off prevention above the entrance section, one-piece welded assembly, with additional support beneath run-out section. Slide of low noise level thanks to trough-shaping.
- tower-shaped roof 72° from highly weather-resistant coloured HPL, 13 mm
- revolving tower flag with K&K logo

For your planning, due to a possible sliding surface heating, please see to a north-east orientation of the slides or provide half-shade of trees.

Metal components: stainless steel

Robinia timber is furnished with water-repellent, breathable protective coating. Besides protection from moisture, that treatment reduces crack formation. Thanks to a specific fastening adaptor, forces arising from the modular attachment parts are directly derived into the posts. Tamper-proof connections thanks to screws with security socket.


play equipment

Tower combination

item number

023850500
<https://kaiser-kuehne.com/products/?lang=en>

product data

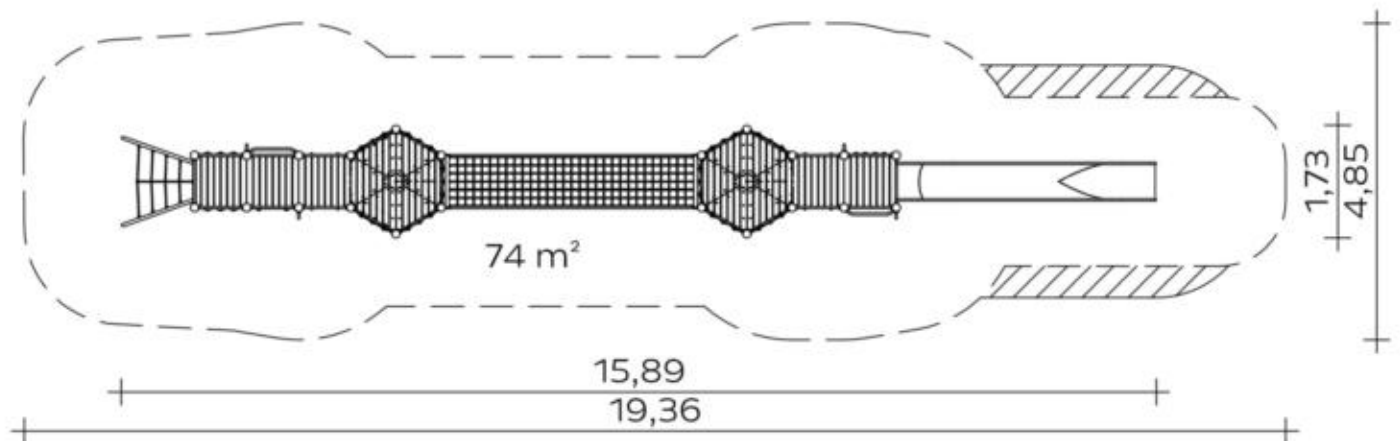

(without scale)

installation

play equipment [m]	l	15,89
	w	1,73
	h	6,87
minimum space [m]	l	19,36
	w	4,85
	h	6,87
impact area [m²]		74,00
free height of fall [m]		2,40
number of mechanics		3
assembly time [hrs]		32
lifting device		no
single weight [kg]		106
total weight [kg]		2.167

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,40	0,40	0,60	0,096	18
1,60	0,40	0,80	0,512	2
0,75	0,40	0,40	0,120	1
			2,872	21

usage

areas of use	public playgrounds
activities	motion activity
age groups	4+
number of users	37
slide heights [m]	2,10
platform heights	1,80 2,00 2,20 2,40 2,60

inclusion	Meeting opportunity		Drama play	
	Individual games		Functional play	
	Speed		Balancing	
	Group games		Altitude experience	
	Communication		Coordination	
	Parallel play		Fumbling	

play equipment
item number

Tower combination
023850500

variants

17967 *Classic*

