

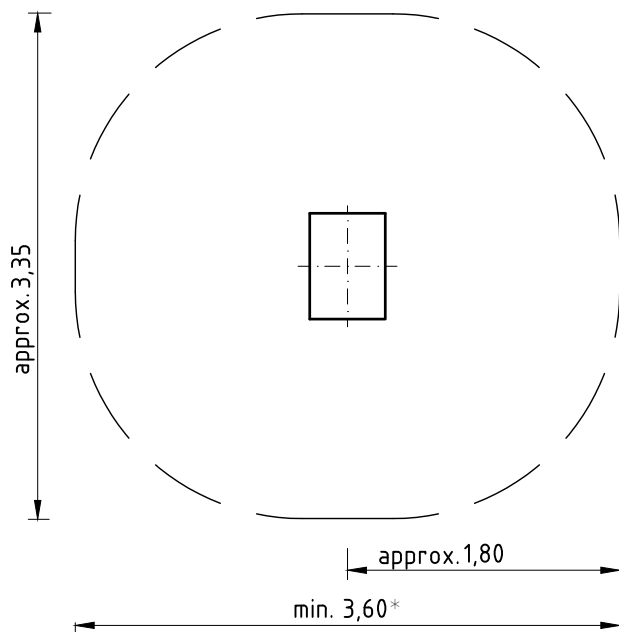
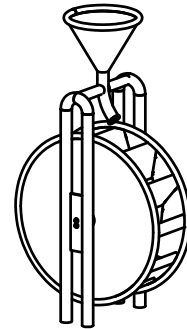


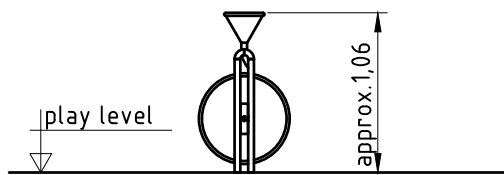

*minimum space requirements approx. 11 m² only referring to a free-standing water wheel as illustrated. If further water play elements are added (like e.g. a water trough), space requirements will have to be adjusted.

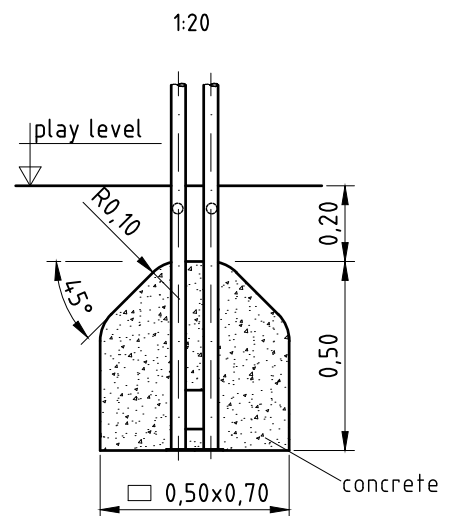

1. Assign a device location considering the (minimum) space requirements.
2. Excavate soil for foundation, according to drawing.
Please note: To achieve maximum stability and a safe installation, a moderate level of soil solubility is required.
3. Place water wheel into the foundation hole. Grout foundation with compressed concrete C20/25, chamfer and round off the edges and cover the foundation with appropriate surfacing material (acc. to EN 1176-1).
4. Release for play after concrete foundation has set.

Please ensure that all special tools supplied (e.g. Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for safety management acc. to EN 1176-7 (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the persons responsible.