



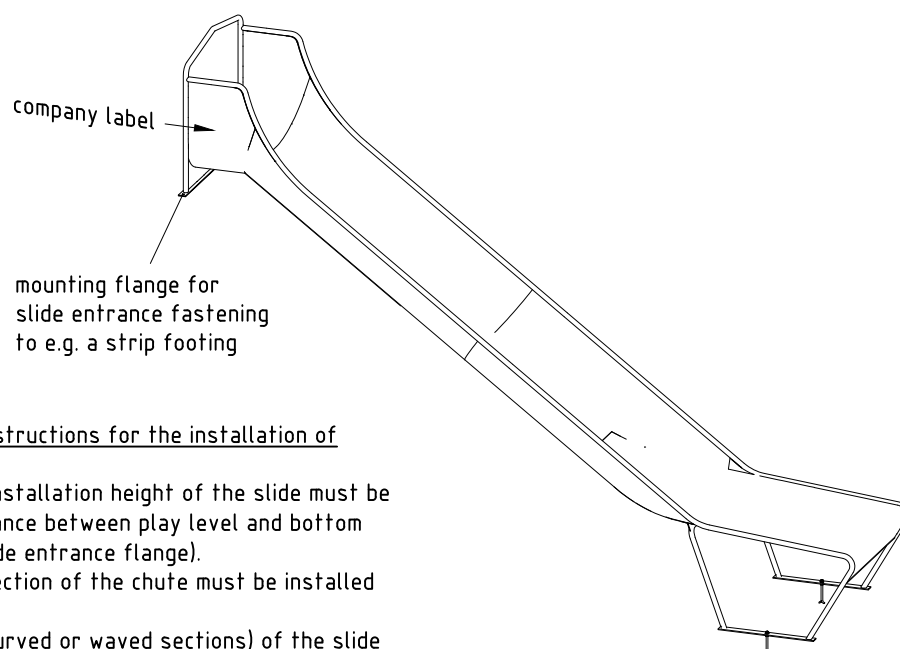


Some additional instructions for the installation of K&K Hill slides

- The specified installation height of the slide must be observed (distance between play level and bottom edge of the slide entrance flange).
- The starting section of the chute must be installed horizontally.
- All (straight, curved or waved sections) of the slide assembly must be installed with the correct inclination (measured in the centre of the slide trough). This does not apply to the hill slide run-out section.
- The hill slide support has to be installed such that it effectively supports the slide, that the curved sections are properly positioned without a deviation from the inclination specified.
- The hill slide run-out section must be installed with an inclination of 5°.

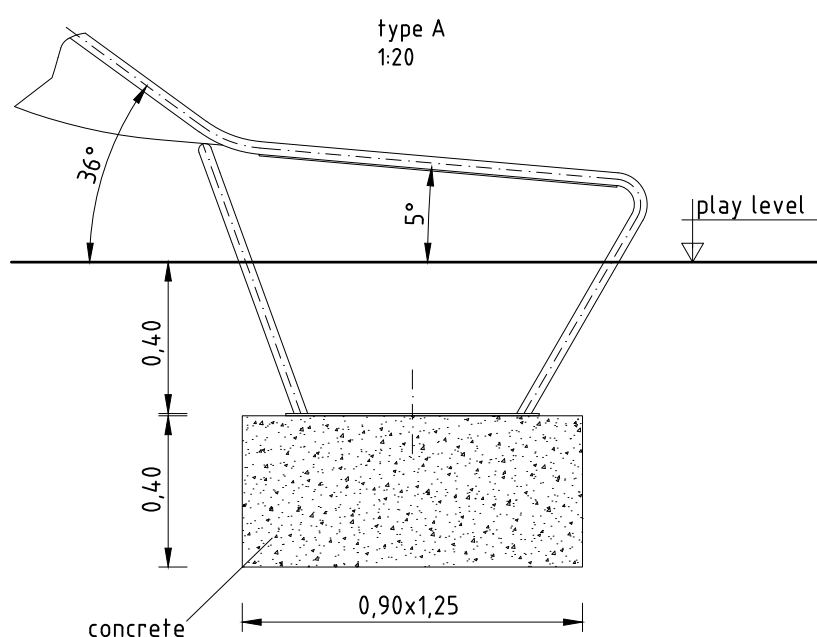


flange fastening
1:10

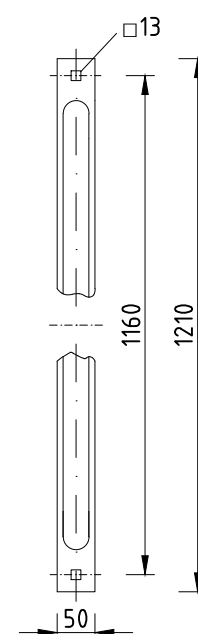


1. Assign a location for the bedway slide considering the space requirements/impact area. Slide direction recommended: north-east or in half-shade of trees.
2. Excavate foundation hole for run-out section acc. to drawing. Please observe the additional details given.
3. Use e.g. lifting gear to carry the bedway slide to the intended mounting place. Fasten flange of slide entrance using the two holes for M12.
4. Grout foundation with compressed concrete C20/25 and insert the stone bolts at the same time.
5. Release for play after concrete foundation has set.

Please take care that all special tools (e.g. special Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for a safety management (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the responsible persons.

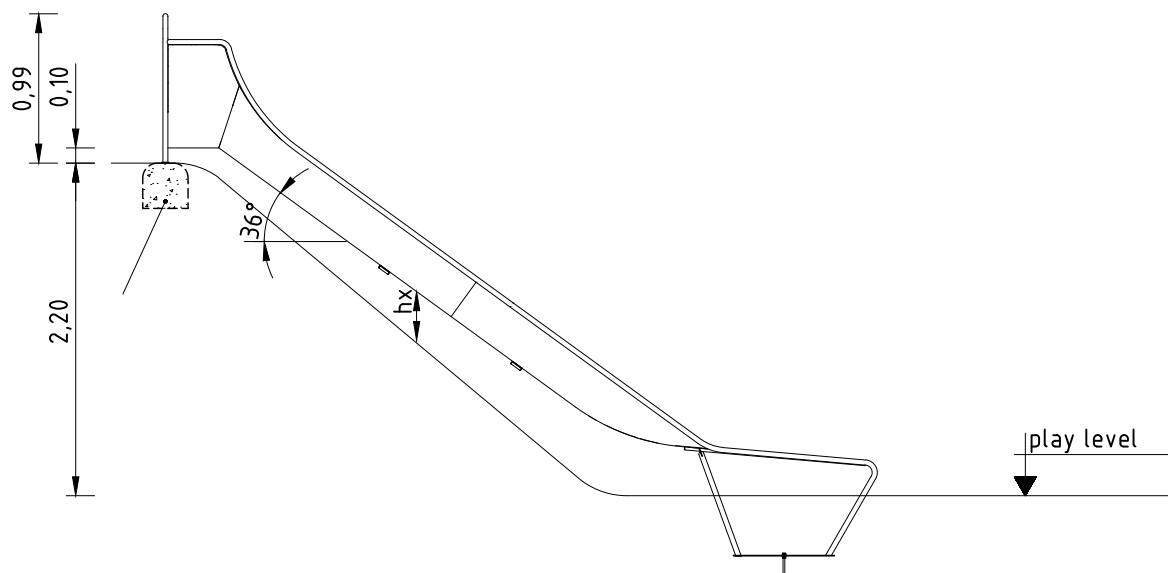

Note: Due to the slide construction, the course of the hill must be shaped such that the fall height will not exceed 2m.

- Due to forced movement, the entire impact area must have impact attenuating surfacing. The critical fall height of the surfacing shall be equal to, or greater than, the free height of fall of the equipment (see EN 1176-1). Depending on the site profile, the free fall height (h_x) and the size of the impact area result from the vertical distance between the bottom of the chute and ground level
- The surfacing material for the impact area within the sliding section must meet the requirements given in table 4 (see EN 1176-1). The shock-absorbing characteristics of any other material to be chosen must be certified in accordance with EN 1177.
- The surface around the run-out section shall have a critical fall height of at least 1000mm and shall be provided to at least 2000 mm beyond the run-out section (acc. to EN 1176-3).

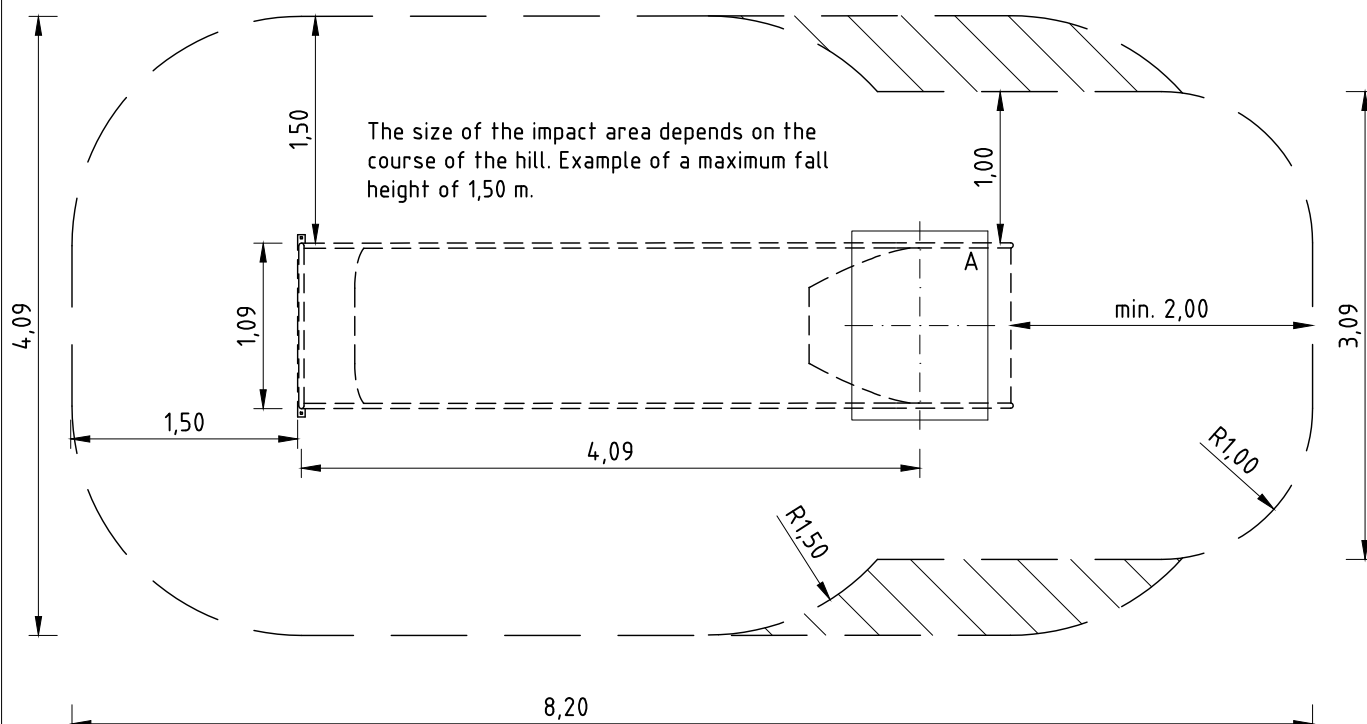

hatched areas:

- free from obstacles
- without requirement for shock-absorbing properties



2 x SFXS1070007 Slide run-out section (mini) stone bolt assembly

per set	total	item no.	material short text
1	2	1070365	Set of stone bolts for slide run-out section



1 x SFWZ0000014 Lubricating metal, bag (4 g)

per set	total	item no.	material short text
1	1	5300024	Metaflux fitting lubricant 2x4 g