


1. Assign a device location considering the space requirements (impact area).
2. Excavate soil for foundations, according to drawing.
Please note: To achieve maximum stability and a safe installation, a moderate level of soil solubility is required.
3. Pour in a drain layer of gravel of approx. 10 cm thickness between the bottom of the posts and plain base of foundation.
4. Insert reinforcing steel into the corresponding holes of the posts.
5. Place posts type A according to the corresponding number (see foundation layout) into the respective foundation hole. Play level mark (=aluminium blind rivet) complies with the installation depth. Align every post by means of the play level mark facing into the same direction (see detail or foundation layout).
6. **For installation of the pre-assembled components and/or single parts, the screws slightly have to be lubricated with installation paste!**
Tighten all screws after having aligned all components.
Screw connections see details in attached list.
7. Grout foundations with compressed concrete C20/25, chamfer and round off the edges, cover the foundations with a surface which meets the requirements for impact attenuation so that the critical fall height of the surfacing is equal to, or greater than, the free height of fall of the equipment (acc. to EN 1176-1).
8. Release for play after concrete foundations have set.
9. According to maintenance instructions, check all screw connections after 4-5 weeks and retighten, if necessary.


Please ensure that all special tools supplied (e.g. Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for safety management acc. to EN 1176-7 (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the persons responsible.



Necessarily insert all attachment parts before tightening the screws. It is NOT possible to insert them afterwards.

Equipment supervision



detail of play level mark
1:5

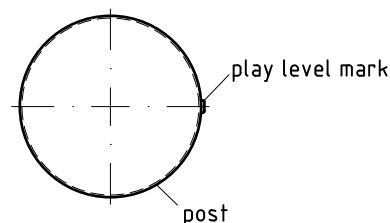

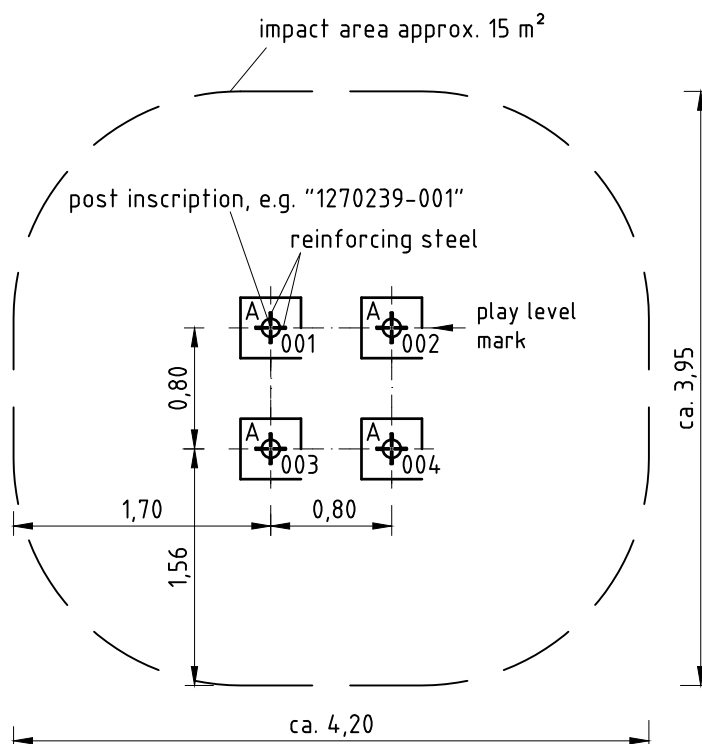
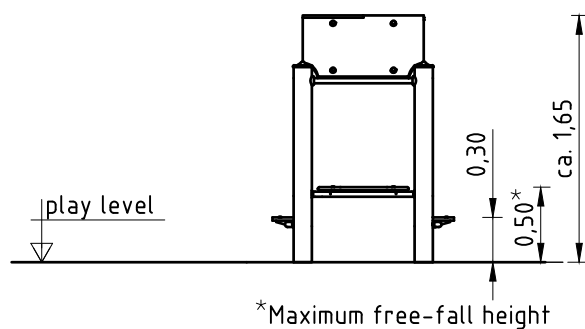



Foundation work involving concrete pouring OR

Foundation work by tamping

Type A
M 1:20

Type A
M 1:20

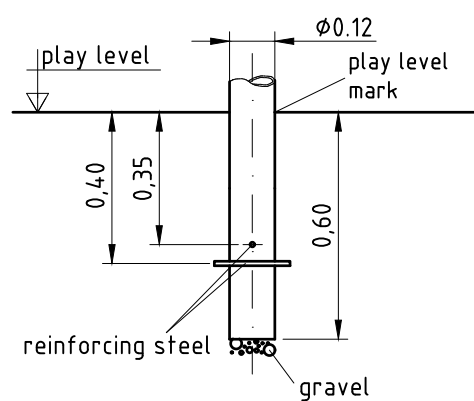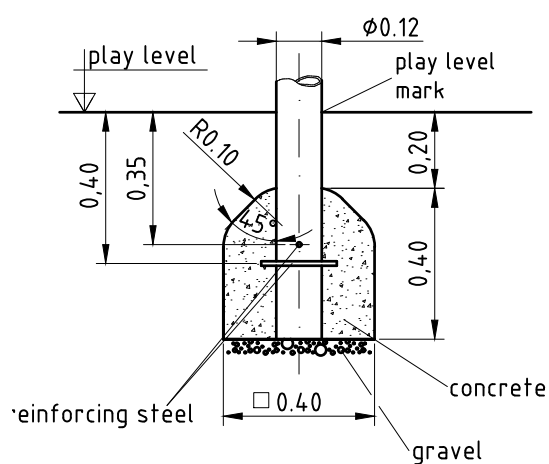

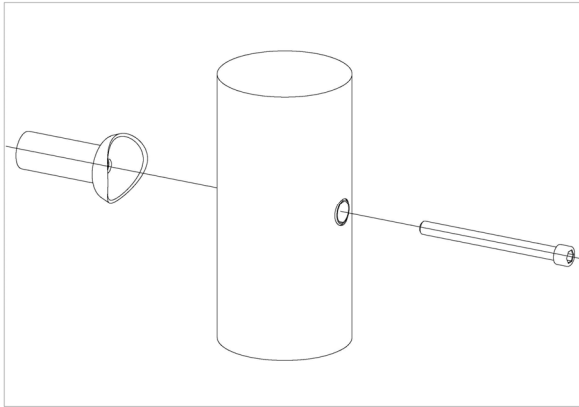


12 x SFES1210001 Standard bolting of attachment parts
(except platforms) to stainless steel posts

per set	total	item no.	material short text
1	12	2030168	Cheese head screw with pin M12x140

2 x SFAS1240002 HPL panel fastening to rectangular inward bracket

per set	total	item no.	material short text
2	4	3400024	mushroom head screw M10 x 35 DIN603 A2
2	4	3300056	white protective screw cap - lower part, M10
2	4	3430014	washer Ø 10,5 DIN125 form B A2
2	4	3430048	lock nut M10 DIN985 A2
2	4	3300057	white protective screw cap - upper part, M10
1	2	6240003	double clip for tent roofs (angled at 90°)

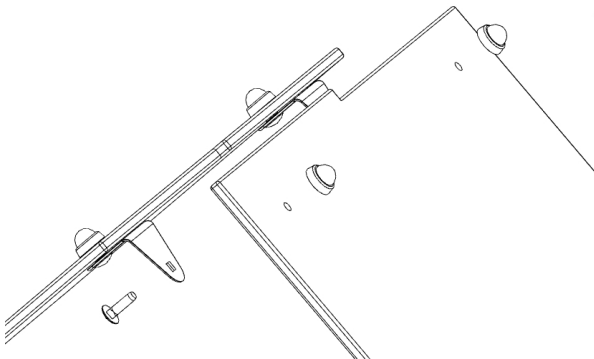

4 x SFES1270001 Reinforcing steel for stainless steel posts

per set	total	item no.	material short text
2	8	2130000	reinforcing steel Ø 10 x 310 DIN 488



1 x SFWZ0000009 Hexagon insert socket driver 10mm 1/2"
with borehole for Pin

per set	total	item no.	material short text
1	1	2030170	Hexagon insert socket driver 10 mm 1/2"





1 x SFWZ0000013 Lubricating metal, twin bag (2 x 4 g)

per set	total	item no.	material short text
1	1	5300024	Metaflux fitting lubricant 2x4 g