



ring-shaped flange Ø 250 mm with three square holes (13 mm), the one at the front is located in the middle of the angle of utility.

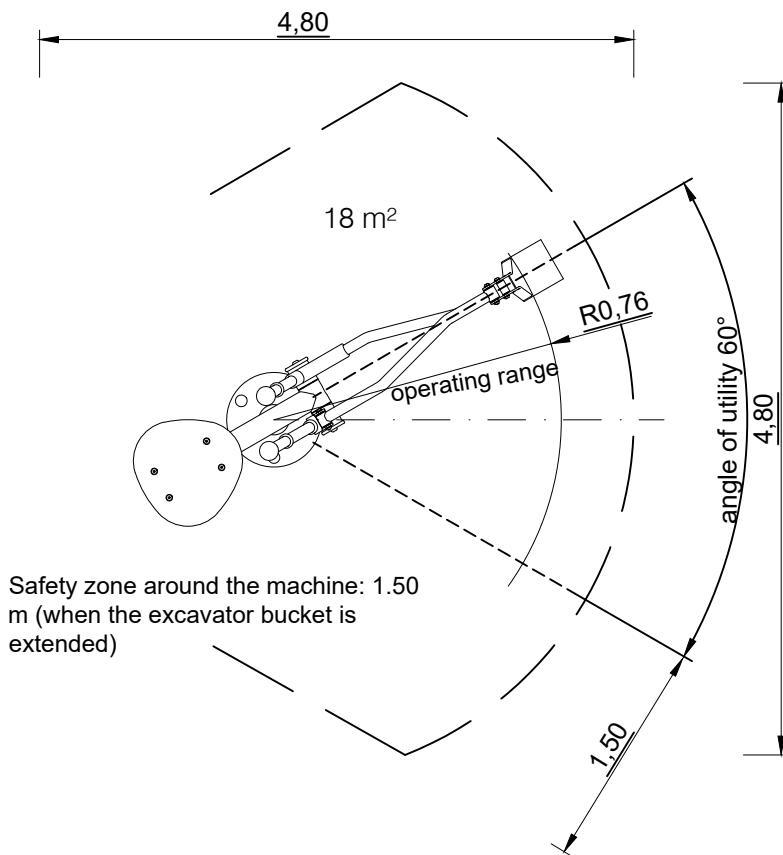

Keep an eye on the check mark/label on top of the flange!

1. Assign a location for the device considering the (minimum) space requirement.
2. Prepare appropriate ground for the ring-shaped foundation.
3. Place the pre-assembled digger at its position planned.
4. Cover the playing area with a sand layer of 0,40 m thickness.
5. Check all screw connections according to maintenance instructions after 4-5 weeks and retighten them, if necessary.

Please take care that all special tools (e.g. special Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for a safety management (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the responsible persons.