

play equipment

Double Swing (2,50) hot-dip galvanised

item number

040342000**product description** (page 1)

- Swing support posts from hot-dip galvanised steel Ø 76,1 mm, wall thickness 2,9 mm; attachment to swing crossbeam by means of connector plates
- Swing crossbeam from hot-dip galvanised steel, Ø 88,9 mm, wall thickness 3,2 mm; attachment to swing supports by means of connector plates
- stainless steel swing axle with internal bearing axle from full material Ø 28 mm, external tube Ø 42,4 mm, wall thickness 2 mm and friction bearings
- trapezoid chain suspension consisting of stainless steel chains Ø 7 mm, with integrated roller bearing swivels preventing chain knotting
- chain attachment to swing axle and swing seat by clamping adaptors made from stainless steel
- safety swing seat made from rubber with stabilising Aluminium insert, gapless single-point chain suspension


play equipment

item number

Double Swing (2,50) hot-dip galvanised

040342000
<https://kaiser-kuehne.com/products/?lang=en>

product data

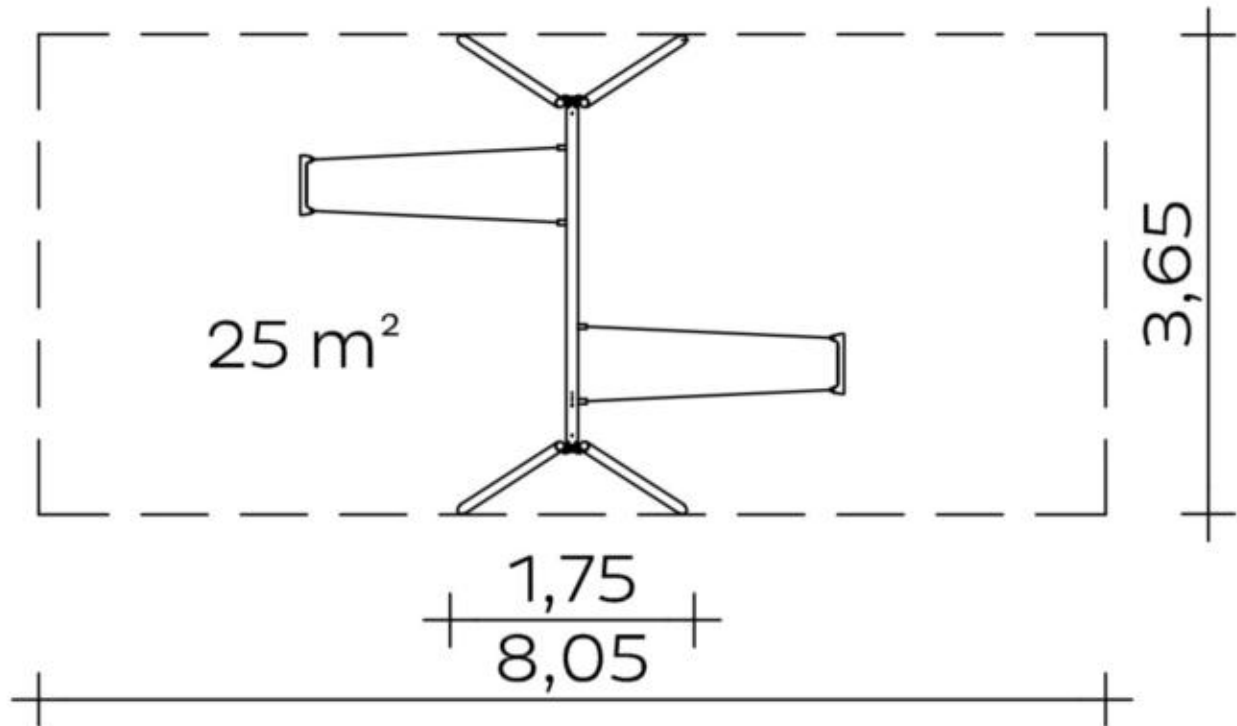

(without scale)

installation

play equipment [m]	l	3,65
	w	1,75
	h	2,71
minimum space [m]	l	8,05
	w	3,65
	h	2,71
impact area [m²]		25,00
free height of fall [m]		1,50
number of mechanics		2
assembly time [hrs]		2
lifting device		no
single weight [kg]		36
total weight [kg]		135

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,70	0,50	0,50	0,175	4
			0,700	4

usage

areas of use	public playgrounds	
activities	swinging	motion activity
age groups	3+	
number of users	2	
inclusion	Drama play	Individual games
	Functional play	Speed
	Balancing	Altitude experience
	Coordination	Parallel play

play equipment
item number

Double Swing (2,50) hot-dip galvanised
040342000

variants

17276 *Classic*

