

play equipment

Triple contact swing (2,50) hot-dip galvanised

item number

040553000**product description** (page 1)

- Swing support posts from hot-dip galvanised steel Ø 76,1 mm, wall thickness 2,9 mm; attachment to swing crossbeam by means of connector plates
- Swing crossbeam from hot-dip galvanised steel, Ø 88,9 mm, wall thickness 3,2 mm; attachment to swing supports by means of connector plates
- stainless steel swing axle with internal bearing axle from full material Ø 28 mm, external tube Ø 42,4 mm, wall thickness 2 mm and friction bearings
- trapezoid chain suspension consisting of stainless steel chains Ø 7 mm, with integrated roller bearing swivels preventing chain knotting
- safety swing seat made from rubber with stabilising Aluminium insert, gapless single-point chain suspension
- chain attachment to swing axle and swing seat by clamping adaptors made from stainless steel

play equipment

**Triple contact swing (2,50) hot-dip
galvanised**

item number

040553000**product description** (page 2)


play equipment

Triple contact swing (2,50) hot-dip galvanised

item number

040553000
<https://kaiser-kuehne.com/products/?lang=en>

product data

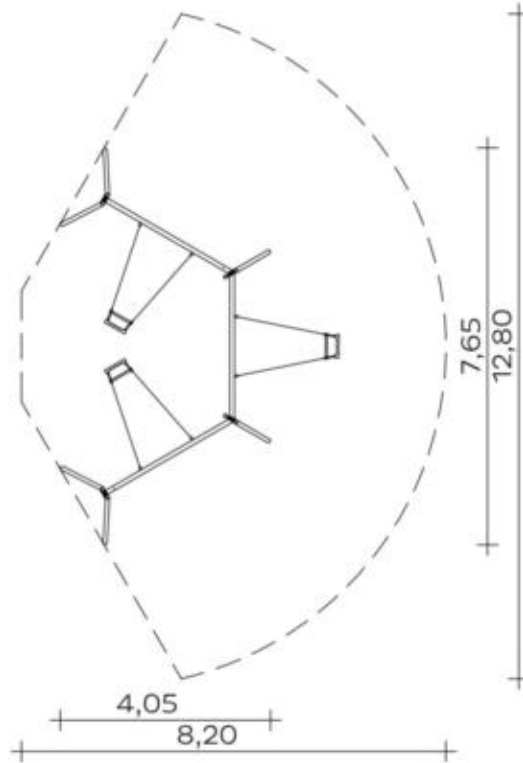

(without scale)

installation

play equipment [m]	l	7,65
	w	4,05
	h	2,71
minimum space [m]	l	12,80
	w	8,20
	h	2,71

impact area [m²]	35,00
free height of fall [m]	1,50

number of mechanics	2
assembly time [hrs]	5

lifting device	no
single weight [kg]	36
total weight [kg]	300

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,70	0,50	0,50	0,175	4
1,60	0,50	0,50	0,400	2
			1,500	6

usage

areas of use	public playgrounds	
activities	swinging	motion activity
age groups	4+	
number of users	3	

inclusion

Meeting opportunity		Drama play	
Individual games		Functional play	
Speed		Balancing	
Group games		Altitude experience	
Coordination		Parallel play	

play equipment

**Triple contact swing (2,50) hot-dip
galvanised**

item number

040553000

variants

17290 *Classic*

