

play equipment

Triple contact swing (2,50) stainless steel

item number

040563000**product description** (page 1)

- Swing support posts from hot-dip galvanised steel Ø 76,1 mm, wall thickness 2,9 mm; attachment to swing crossbeam by means of connector plates
- Swing crossbeam from hot-dip galvanised steel, Ø 88,9 mm, wall thickness 3,2 mm; attachment to swing supports by means of connector plates
- stainless steel swing axle with internal bearing axle from full material Ø 28 mm, external tube Ø 42,4 mm, wall thickness 2 mm and friction bearings
- trapezoid chain suspension consisting of stainless steel chains Ø 7 mm, with integrated roller bearing swivels preventing chain knotting
- safety swing seat made from rubber with stabilising Aluminium insert, gapless single-point chain suspension
- chain attachment to swing axle and swing seat by clamping adaptors made from stainless steel


play equipment

item number

Triple contact swing (2,50) stainless steel

040563000
<https://kaiser-kuehne.com/products/?lang=en>

product data

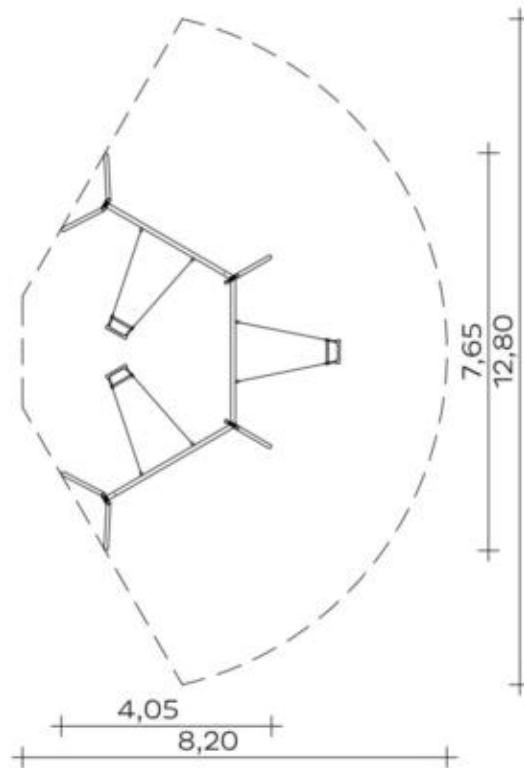

(without scale)

installation

play equipment [m]	l	7,65
	w	4,05
	h	2,71
minimum space [m]	l	12,80
	w	8,20
	h	2,71
impact area [m²]		35,00
free height of fall [m]		1,50
number of mechanics		2
assembly time [hrs]		5
lifting device		no
single weight [kg]		36
total weight [kg]		300

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,70	0,50	0,50	0,175	4
1,60	0,50	0,50	0,400	2
			1,500	6

usage

areas of use	public playgrounds	
activities	swinging	motion activity
age groups	4+	
number of users	3	

inclusion

Meeting opportunity		Drama play	
Individual games		Functional play	
Speed		Balancing	
Group games		Altitude experience	
Coordination		Parallel play	

play equipment
item number

Triple contact swing (2,50) stainless steel
040563000

variants

17293 *Classic*

