

play equipment

Sixfold contact swing (2,50) stainless steel

item number

040566000**product description**

(page 1)



- Swing support posts from hot-dip galvanised steel Ø 76,1 mm, wall thickness 2,9 mm; attachment to swing crossbeam by means of connector plates
- Swing crossbeam from hot-dip galvanised steel, Ø 88,9 mm, wall thickness 3,2 mm; attachment to swing supports by means of connector plates
- stainless steel swing axle with internal bearing axle from full material Ø 28 mm, external tube Ø 42,4 mm, wall thickness 2 mm and friction bearings
- trapezoid chain suspension consisting of stainless steel chains Ø 7 mm, with integrated roller bearing swivels preventing chain knotting
- safety swing seat made from rubber with stabilising Aluminium insert, gapless single-point chain suspension
- chain attachment to swing axle and swing seat by clamping adaptors made from stainless steel

play equipment **Sixfold contact swing (2,50) stainless steel**

item number **040566000**

product description (page 2)


play equipment

Sixfold contact swing (2,50) stainless steel

item number

040566000
<https://kaiser-kuehne.com/products/?lang=en>

product data

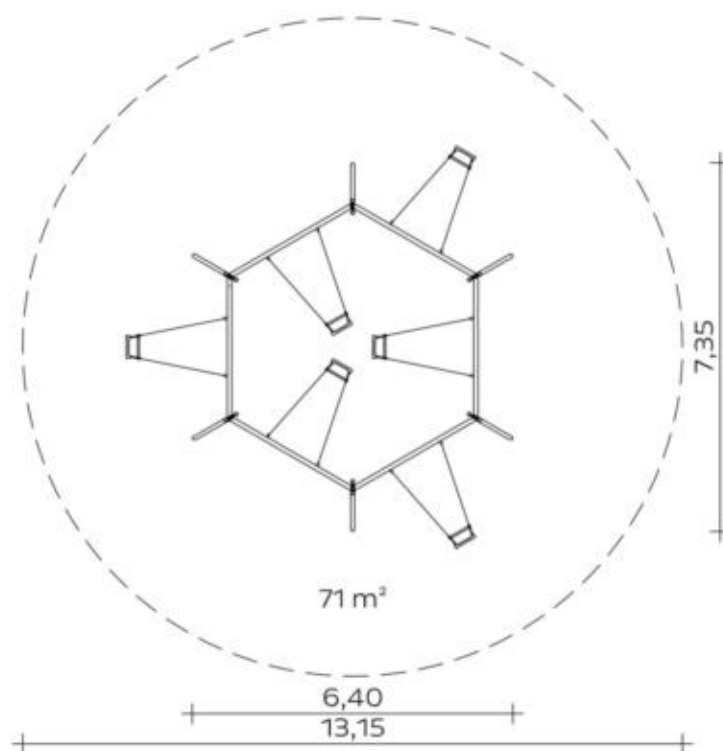

(without scale)

installation

play equipment [m]	l	7,35
	w	6,40
	h	2,71
minimum space [m]	l	13,15
	w	13,15
	h	2,71

impact area [m²]	71,00
free height of fall [m]	1,50

number of mechanics	2
assembly time [hrs]	6

lifting device	no
single weight [kg]	36
total weight [kg]	500

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
1,60	0,50	0,50	0,400	6
			2,400	6

usage

areas of use

activities

swinging

motion activity

age groups

4+

number of users

6

inclusion

Meeting opportunity



Drama play



Individual games



Functional play



Speed



Balancing



Group games



Altitude experience



Coordination



Parallel play



play equipment

Sixfold contact swing (2,50) stainless steel

item number

040566000

variants

17294 *Classic*

