


1. Attach assembly to HPL-water troughs (see figure below)
2. Please take care to comply with instructions acc. to EN 1176-1 / 4.2.7 (Protection against entrapment)
Do not create entrapment hazards (unallowable openings) by installation.
3. Check all screw connections according to maintenance instructions after 4-5 weeks and retighten, if necessary.

Please ensure that all special tools (e.g. special Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for safety management acc. to EN 1176-7 (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the persons responsible.

Water-supply (on site):
flexible hosepipe with
Gardena® hose connector
for 1/2" or 3/4"-hoses

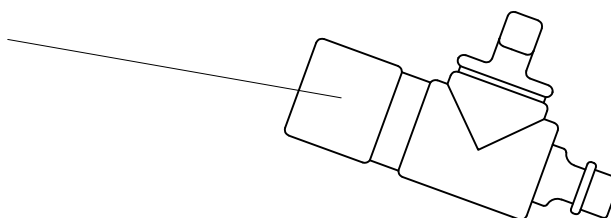

Volumetric flow rate adjustment

