

1. Assign a device location considering the space requirements (impact area). Slide direction recommended: north-east or in half-shade of trees.
2. Excavate soil for foundations, according to drawing.
Please note: To achieve maximum stability and a safe installation, a moderate level of soil solubility is required.
3. Pour in a drain layer of gravel of approx. 10 cm thickness between the bottom of the tubular pedestals and plain base of foundation.
4. Place posts type A (see foundation layout) according to the corresponding number into the respective foundation hole. Play level mark (=aluminium blind rivet) complies with the installation depth. Align every post by means of the play level mark facing into the same direction (see detail or foundation layout).

5. For installation of the pre-assembled components and/or single parts, the screws slightly have to be lubricated with installation paste!

Screw together platforms/ramp and posts by using the respective hole in the mounting brackets (according to chart).

Tighten all screws after having aligned all components.

Install the slide exit with an inclination of 5° in sliding direction.

Screw connections see details in attached list.

We recommend not to insert the protection caps enclosed before first maintenance as they are only suitable for one-time use (see description in item No. 8).

6. Grout foundations with compressed concrete C20/25, chamfer and round off the edges, cover the foundations with a surface which meets the requirements for impact attenuation so that the critical fall height of the surfacing is equal to, or greater than, the free height of fall of the equipment (acc. to EN 1176-1).
The run-out section fall zone must have surfacing with a critical fall height of at least 1000mm (acc. to EN 1176-3).
7. Release for play after concrete foundations have set.

8. According to maintenance instructions, check all screw connections after 4-5 weeks and retighten, if necessary. Afterwards cover the screw heads with protection caps as follows: Insert grey protection caps into the countersunk drills (e.g. for platforms). The non-countersunk drills (e.g. for walls or a slide) have to be covered with the red protection caps by placing them onto the base part. Strongly pound them (e.g. by using a plastic mallet) until they audibly snap into the base part groove.

Please ensure that all special tools supplied (e.g. Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for safety management acc. to EN 1176-7 (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the persons responsible.

Necessarily insert all attachment parts before tightening the screws.

It is NOT possible to insert them afterwards.



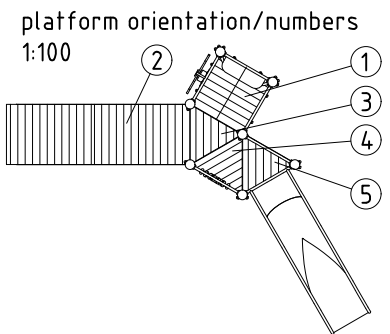


chart platform fastening





platform-no.	fastening hole		
	top	middle	bottom
1		x	
2			x
3	x		
4			x
5		x	

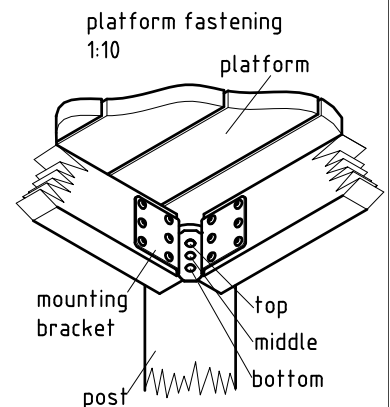



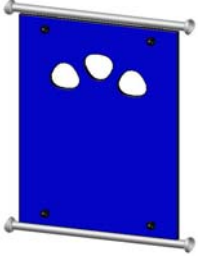


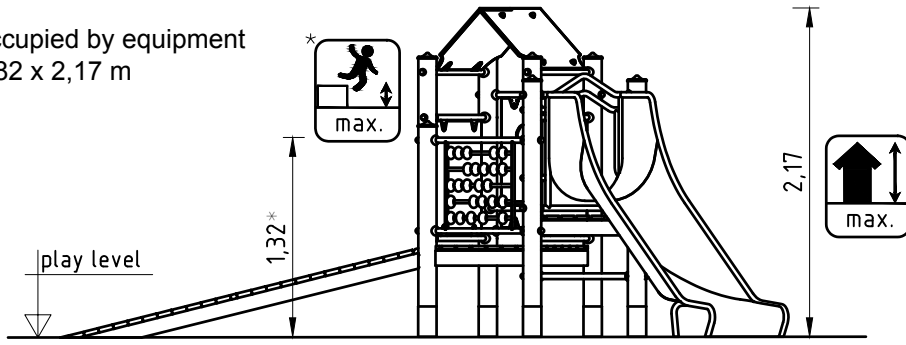





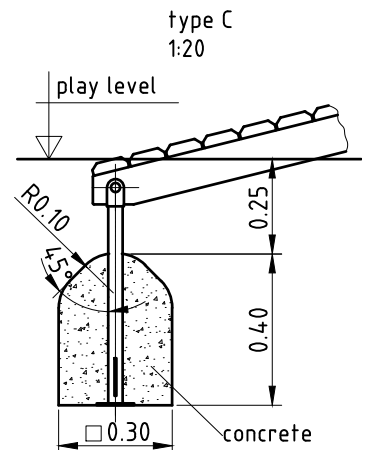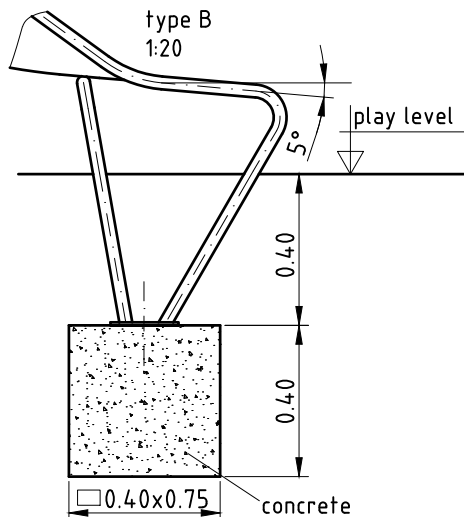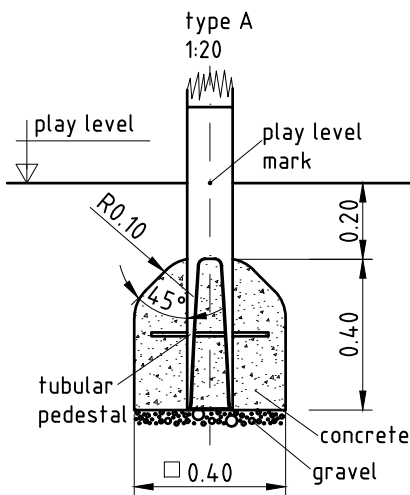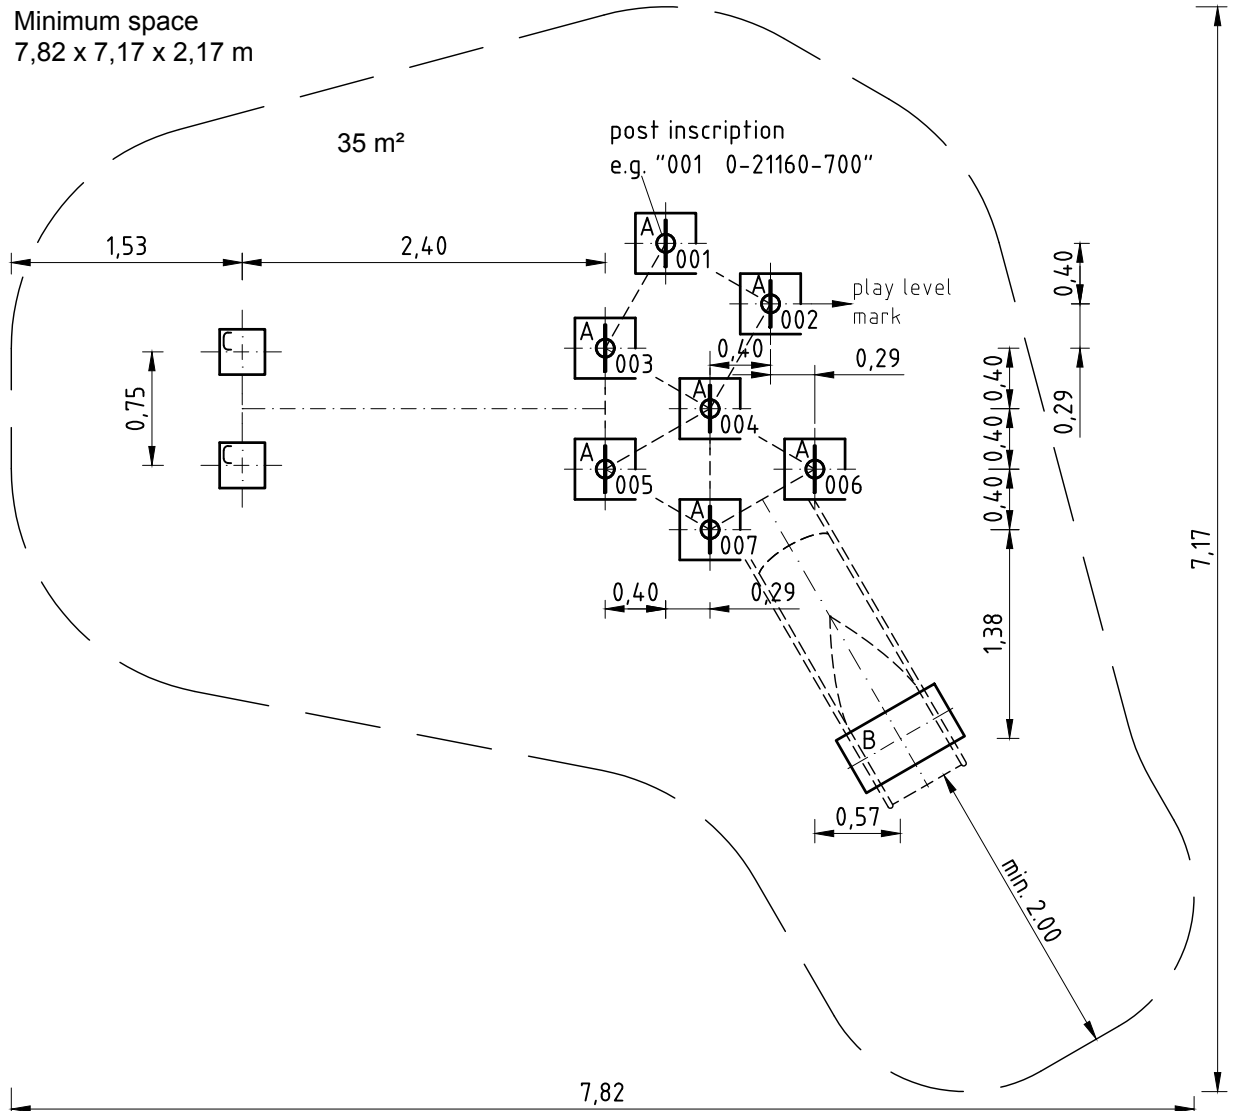
Space occupied by equipment
4,82 x 3,82 x 2,17 m





Minimum space
7,82 x 7,17 x 2,17 m



<u>Parts list</u>		021160700	GB
item no.	quantity	description	image
	1	set of (7 pcs.) laminated Robinia posts Ø 120 equipped with stainless steel tubular pedestal short length = 600 mm / with bottom cut-outs and protective stainless steel post cap	
1200004	3	triangular platform 3 x 0,80 m	
1200000	1	square platform 0,80 m x 0,80 m	
1210004	1	infill panel 0,80 m x 0,80 m / red HPL	
1210092	1	infill panel 0,80 m x 0,90 m / blue HPL 3 cutouts	
1230234	1	ramp 0,80 m x 2,40 m x 0,60 m	

<u>Parts list</u>		021160700	GB
item no.	quantity	description	image
1210373	1	entrance guardrail 0,80 m	 A silver metal guardrail with a curved top and two vertical posts.
1210359	1	horizontal bar/ladder rung 0,80 m	 A single silver horizontal bar with rounded ends.
1210019	1	slide rule 0,80 x 0,60 m	 A rectangular slide rule with a grid and red and black beads.
1210060	1	infill panel with wheel of fortune / red HPL	 A red square panel with a yellow wheel of fortune in the center, numbered 1-12.
1220021	1	bench seat type 1 / 0,80 m / yellow HPL	 A yellow bench seat with a curved backrest.
1240031	1	pitch roof 0,80 m x 0,80m / dark brown HPL	 A dark brown rectangular panel with a pitched roof structure.

<u>Parts list</u>		021160700	GB
item no.	quantity	description	image
041409001	1	K&K Trough-shaped attachment slide (0,80)	
1299074	1	fastening kit for 0211600700	


Item: **021160700**
 K&K Play structure
 Location:

Order:

1299074


Building Project:

10 x SFRS1200001 Platform at Robinia post, nut is platform-sided

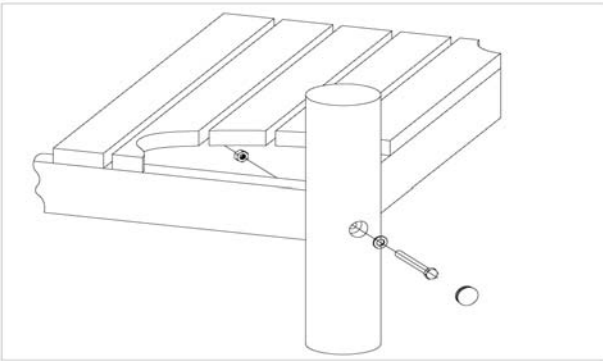


per SC	Total	K&K-Item	Marking
1 x	10 x	3400700	Hexagon head screw M12 x 120 DIN931 A2 with screw security coating/FGB red
1 x	10 x	3300016	Grey domed plastic cover cap SL 36 G
1 x	10 x	3430129	Washer Ø 14 DIN1440 A2
1 x	10 x	3430021	Lock nut M12 DIN985 A2

5 x SFRS1200004 Platform at Robinia post screw fixed on production

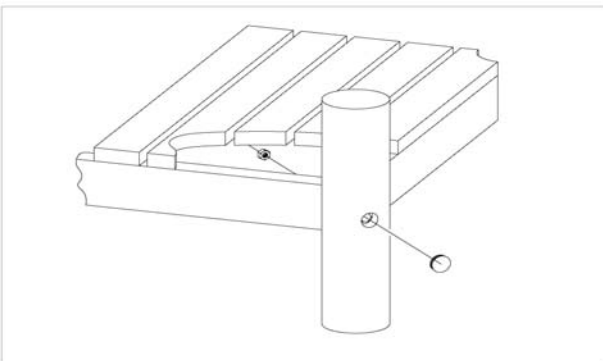


per SC	Total	K&K-Item	Marking
1 x	5 x	3300016	Grey domed plastic cover cap SL 36 G
1 x	5 x	3430021	Lock nut M12 DIN985 A2

32 x SFRS1210001 Standard bolting of barriers, handrails, slides to Robinia posts

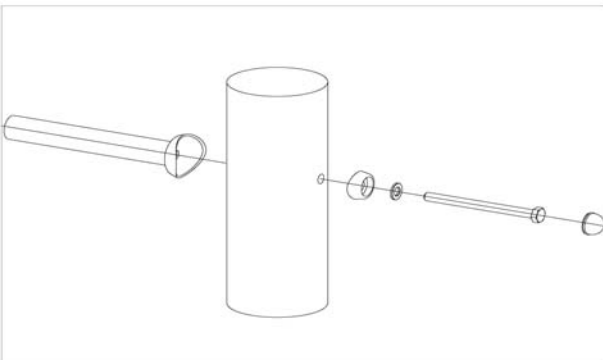

per SC	Total	K&K-Item	Marking
1 x	32 x	3300055	red protective screw cap - upper part, domed M12
1 x	32 x	3300054	red protective screw cap - lower part, domed M12
1 x	32 x	3430025	Washer Ø 13 DIN125 A2
1 x	32 x	3400702	Hexagon head cap screw M12 x 160 DIN931 A2 with screw security coating FGB red

1 x SFAS1240002 Ridge roof 0,80 m x 0,80 m HPL panel fastening on double clips (bottom-sided)

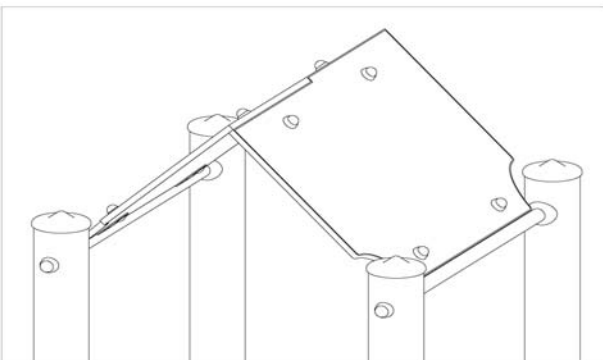

per SC	Total	K&K-Item	Marking
4 x	4 x	3300056	white protective screw cap - lower part, M10
4 x	4 x	3400024	Mushroom head screw M10 x 35 DIN603 A2
4 x	4 x	3430048	Lock nut M10 DIN 985 A2
4 x	4 x	3300057	white protective screw cap - upper part, M10
4 x	4 x	3430014	Washer Ø 10,5 DIN 125 B A2
2 x	2 x	6240003	double clip for tent roofs (angled at 90°)


Item: 021160700
 K&K Play structure

Order:


1299074

Location:

Building Project:

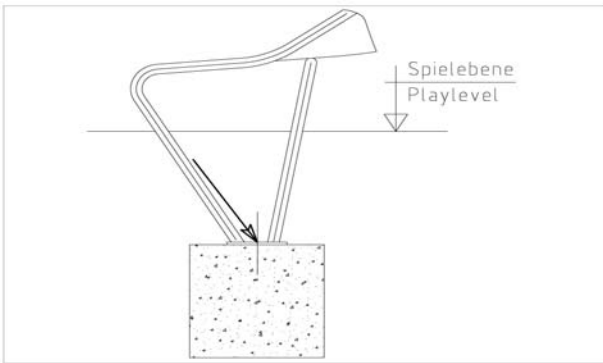1 x SFAS1070006 Slide run-out section (up to 2,00 m) on foundation stone bolt assembly


per SC	Total	K&K-Item	Marking
2 x	2 x	1070365	Set of stone bolts for slide run-out section M12x160

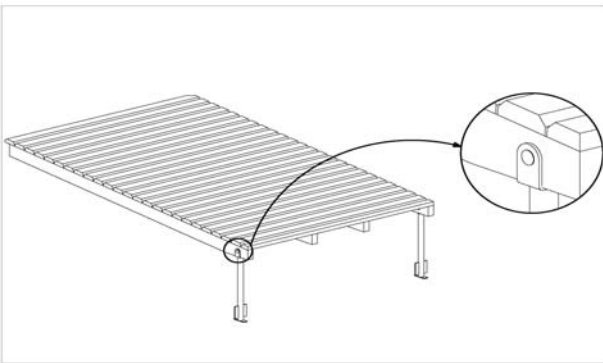1 x SFAS1230010 Steel pedestal at wooden ramp


per SC	Total	K&K-Item	Marking
2 x	2 x	3430048	Lock nut M10 DIN 985 A2
2 x	2 x	3430014	Washer Ø 10,5 DIN 125 B A2
2 x	2 x	3400416	Mushroom head screw M10 x 65 DIN603 A2

7 x SFES1270007 Reinforcing steel for tubular pedestals


per SC	Total	K&K-Item	Marking
1 x	7 x	2130000	Reinforcing steel Ø 10 x 310 DIN 488

1 x SFWZ0000012 Lubricating metal (30g box) incl. brush


per SC	Total	K&K-Item	Marking
1 x	1 x	5300039	Lubricating metal box 30g
1 x	1 x	5200026	Brush for lubricating metal