

play equipment

Climbing combination

item number

023831505**product description** (page 1)Posts

Posts made from stainless steel tubes Ø 120 mm covered by non-detachable protective stainless steel caps

Platforms

Platforms from boards of 30 mm thickness and all-round square-shaped joists 45 x 100 mm. Dried timber from Robinia, planed, milled and free from decay. Force-fitting fastening through specific stainless steel brackets with end-to-end bolt assembly.

Attachment parts

- tubular stainless steel infill barrier, Ø 33,7 x 2 / 25 x 2 mm, one-piece welded assembly
- bowed guardrail with roll-off prevention, from stainless steel tubes, Ø 33,7 x 2 mm
- tandem guardrail with roll-off prevention, from stainless steel tubes, Ø 33,7 x 2 mm
- infill panels from Robinia, 125 x 30 mm, fastening between stainless steel tubes Ø 33,7 x 2 mm
- climbing wall with 12 cut-outs from highly weather-resistant red HPL, 20 mm thickness, framed by stainless steel tubes
- sloped scramble up net made from Hercules rope, suspended from stainless steel crossbeam
- vertical climbing pole made from stainless steel tubes Ø 38 mm
- climbing rungs from stainless steel tube Ø 33,7 x 2 mm with twist protection
- tent roof with preassembled whirligig, 45° inclination, made from highly weather-resistant HPL panels, 13 mm thickness, fastening to stainless steel frame Ø 33,7 x 2 mm
- attachment slide, width 1,10 m, one-piece welded assembly, stainless steel sheet thickness: 2,5 mm, with roll-off prevention above the entrance section
- tunnel hill slide, width 0,60 m resp. 0,80 m, one-piece welded assembly, stainless steel sheet thickness: 2,5 mm, with stainless steel support post Ø 120 mm

For your planning, due to a possible sliding surface heating, please see to a north-east orientation (northern hemisphere) of the slides or provide half-shade of trees.

For countries in the southern hemisphere, see to a south-east orientation.

Metal components: stainless steel

Robinia timber is furnished with water-repellent, breathable protective coating. Besides protection from moisture, that treatment reduces crack formation. Thanks to a specific fastening adaptor, forces arising from the modular attachment parts are directly

play equipment **Climbing combination**
item number **023831505**

product description (page 2)

derived into the posts. Tamper-proof connections thanks to screws with security socket.


play equipment

item number

Climbing combination

023831505
<https://kaiser-kuehne.com/products/?lang=en>

product data

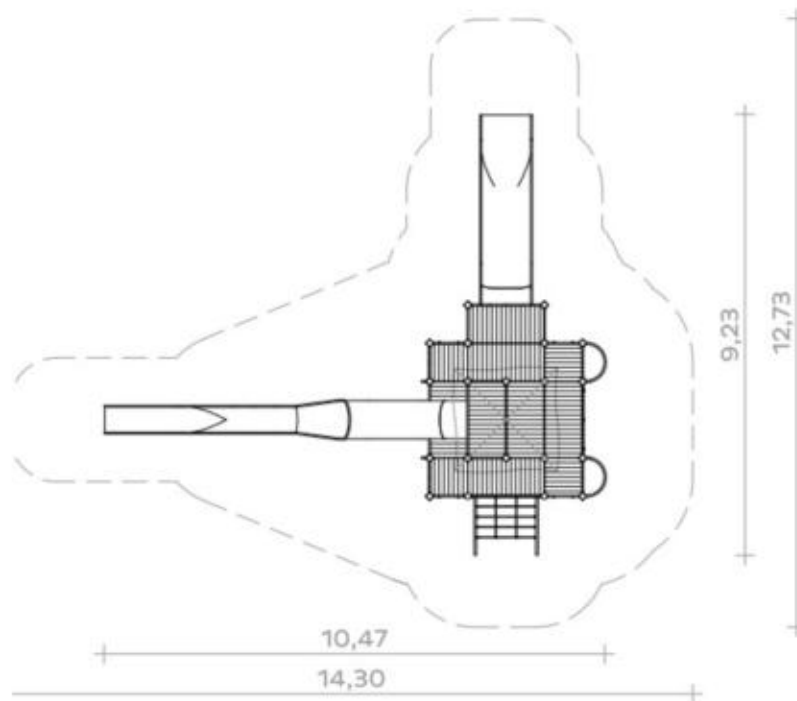

(without scale)

installation

play equipment [m]	l	10,50
	w	9,25
	h	6,00
minimum space [m]	l	14,30
	w	12,75
	h	6,00
impact area [m²]		95,00
free height of fall [m]		2,10
number of mechanics		4
assembly time [hrs]		10
lifting device		yes
single weight [kg]		115
total weight [kg]		1.130

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,40	0,40	0,40	0,064	20
0,30	0,30	0,40	0,036	2
1,25	0,40	0,40	0,200	1
0,60	0,40	0,40	0,960	1
1,40	0,75	0,40	0,420	1
			2,932	25

usage

areas of use	public playgrounds
activities	sliding motion activity climbing
age groups	4+
number of users	32
slide heights [m]	2,10 3,10
platform heights	1,00 2,00 3,00
inclusion	Drama play Individual games Functional play Speed Balancing Group games Altitude experience Coordination Parallel play

play equipment
item number

Climbing combination

023831505

variants

16763 *Classic*



16764 *Mermaid*



26257 *Aloha*



26258 *Beach*



26259 *City*



26260 *Coral*



26261 *Ice Palace*



26262 *Jungle*



26263 *Nature*



26264 *Ocean*



26265 *Pirate*



26266 *Safari*



26267 *Sky*



26268 *Sun*



26269 *Sunny Day*



play equipment

Climbing combination

item number

023831505

variants

26270 *Sweden*

