

play equipment

Inclusive carousel Ø 2,00 m with seat

item number

043620000**product description** (page 1)

Carousel with barrier-free, level access and seats

Rotating base and superstructure: profiled stainless steel sheet/stainless steel. Easily accessible maintenance opening for checking and cleaning the substructure if necessary.

Roller bearing: central cross-roller bearing, non-intrusive, dirt-protected, with an anti-corrosion coating with automatic lubricator (Renewal required annually).

Carousel anchoring: Dowelling on in-situ or prefabricated foundation

Please note:

The impact surface around the play equipment must have an appropriate level of shock absorption corresponding to a free fall height of at least 600 mm (see EN 1176-5).

The access path should be suitable for use by wheelchair users.

Alternative to in-situ foundation:


Pre-fabricated foundation Art.-Nr. 015994 (at extra charge)

1 pc. Ø 1,70 x 0,20 m

Weight: 900 kg

play equipment

item number

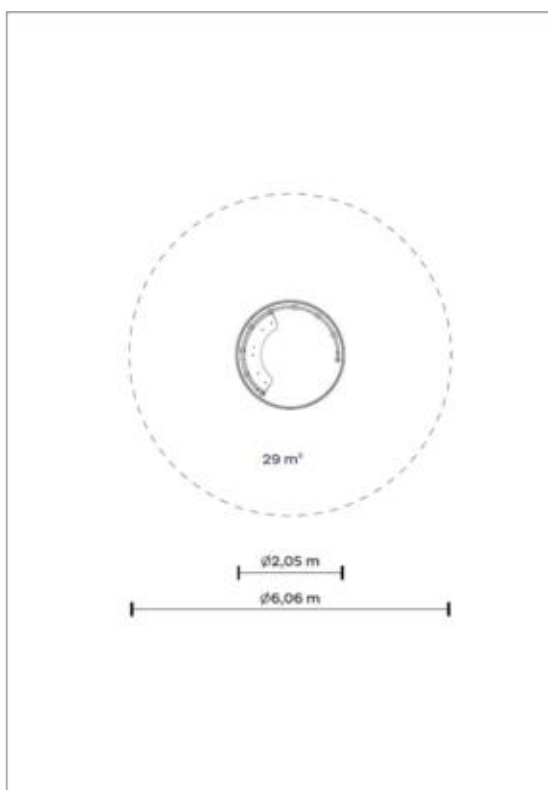Inclusive carousel Ø 2,00 m with seat
043620000
<https://kaiser-kuehne.com/products/?lang=en>
product data


(without scale)

installation

play equipment [m]	l	2,06
	w	2,06
	h	0,68
minimum space [m]	l	6,06
	w	6,06
	h	0,68
impact area [m²]		29,00
free height of fall [m]		0,35
number of mechanics		2
assembly time [hrs]		2
lifting device		yes
single weight [kg]		408
total weight [kg]		408

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
1,40	1,40	0,20	0,392	1
			0,392	1


usage

areas of use	public playgrounds
activities	motion activity sporting activity social activity manual activity
age groups	4+
number of users	5
inclusion	Meeting opportunity Functional play Coordination Individual games Speed Self-awareness

play equipment
item number

**Inclusive carousel Ø 2,00 m with seat
043620000**

variants

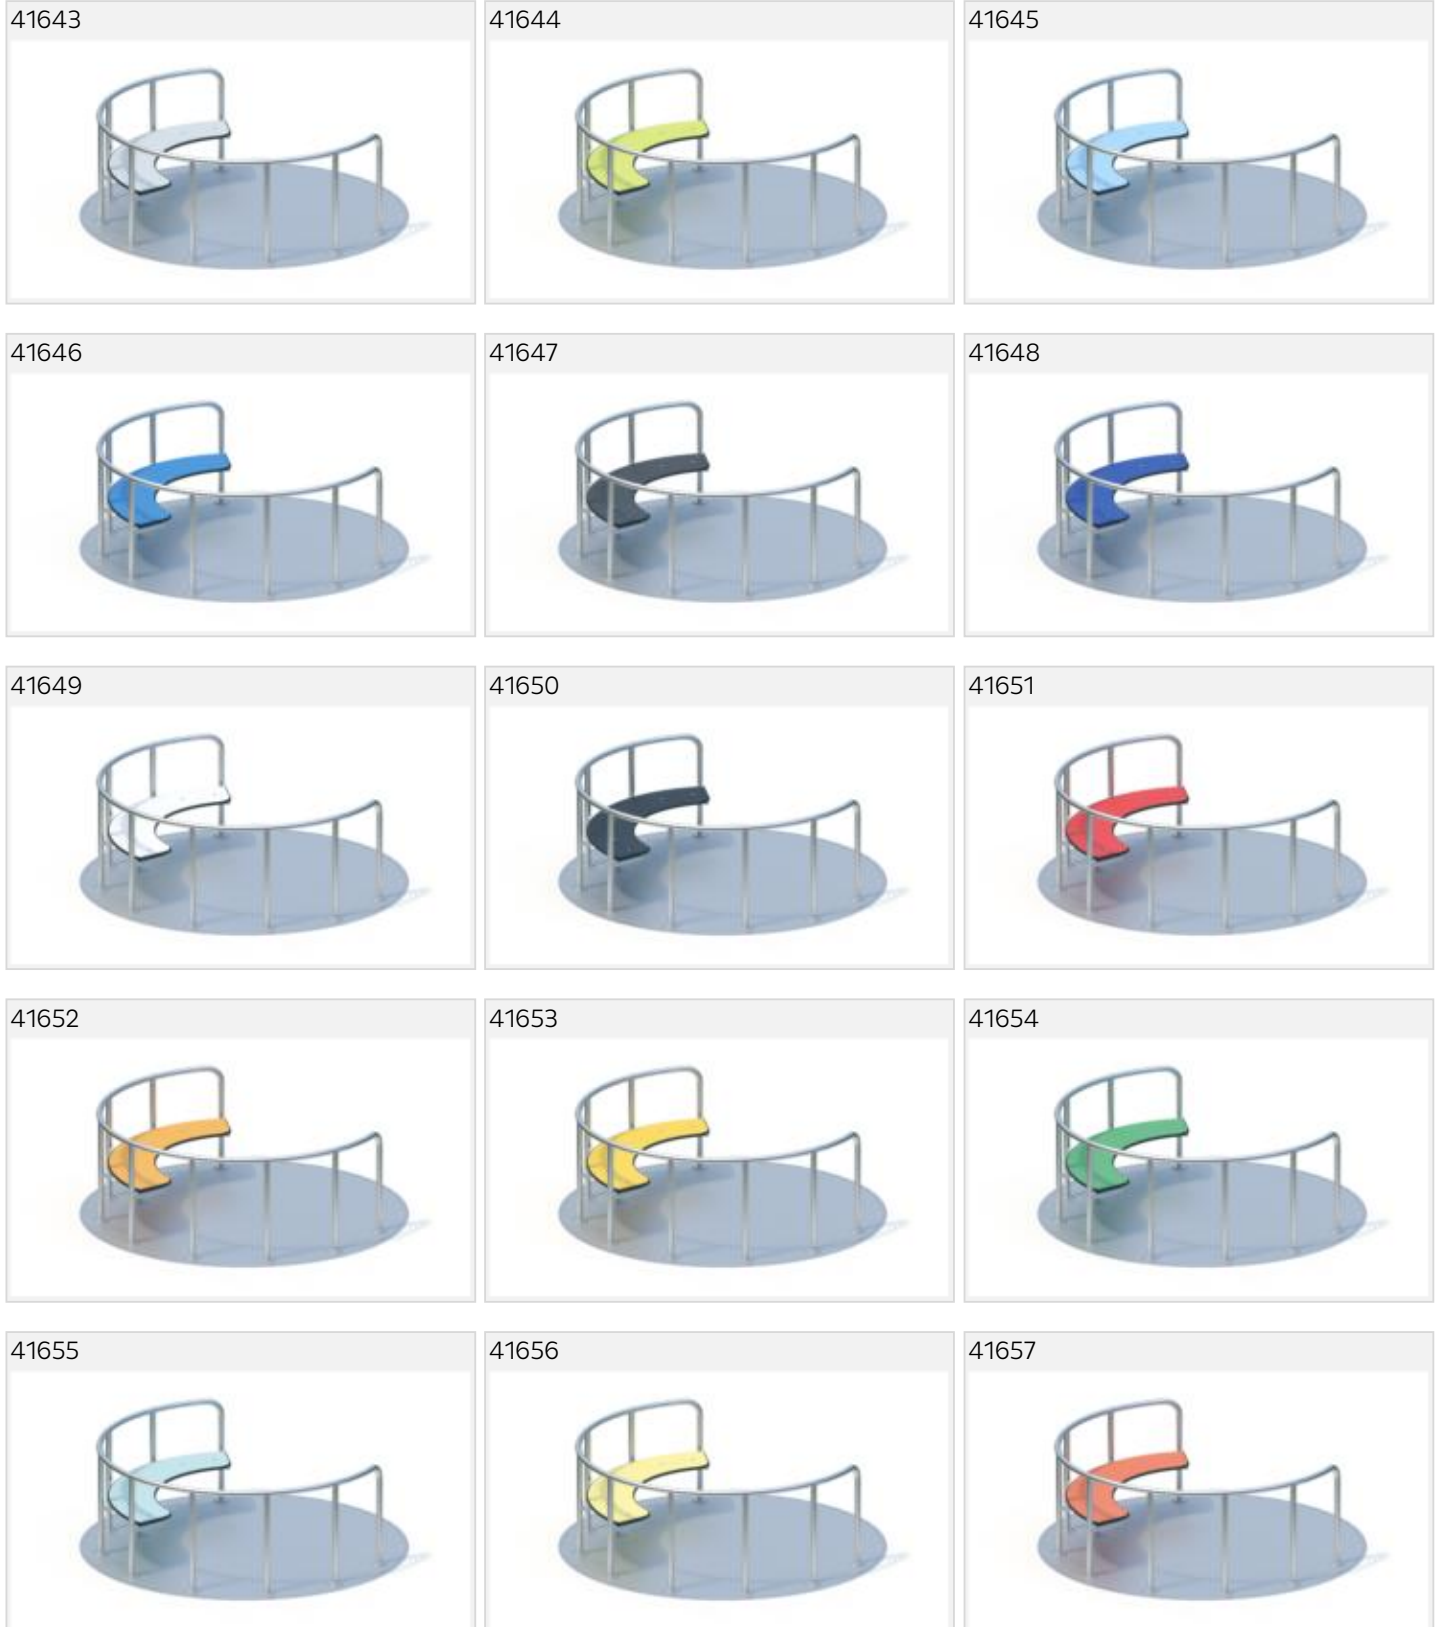

play equipment

Inclusive carousel Ø 2,00 m with seat

item number

043620000

variants

41658



41659



41660



41661



41662



41663



41664

