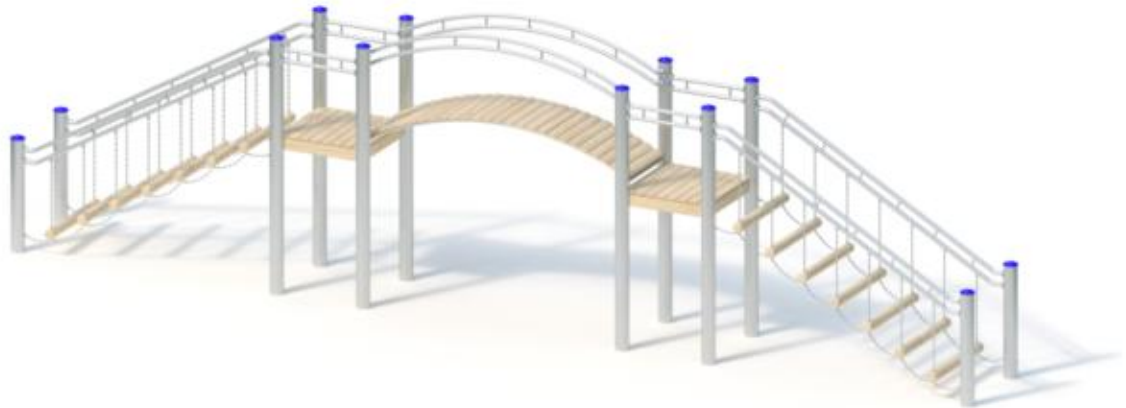


play equipment

Bridge combination

item number

028172500**product description** (page 1)Posts

Posts made from stainless steel tubes Ø 12 cm, material thickness 3 mm, covered by non-detachable protective stainless steel caps. Attachment of the modular components to the posts by means of sturdy fully welded stainless steel sockets without protruding parts.

Platforms

Platforms from boards of 30 mm thickness and all-round square-shaped joists 45 x 100 mm. Dried timber from Robinia, planed, milled and free from decay. Force-fitting fastening through specific stainless steel brackets with end-to-end bolt assembly.

Attachment parts

- tandem guardrail from stainless steel tubes, Ø 33,7 x 2 mm
- sloping tottery stairs suspended from fine stainless steel chains fixed to tandem guardrails
- arch-shaped Robinia bridge with stainless steel handrails

Metal components: stainless steel

Robinia timber is furnished with water-repellent, breathable protective coating. Besides protection from moisture, that treatment reduces crack formation. Thanks to a specific fastening adaptor, forces arising from the modular attachment parts are directly derived into the posts. Tamper-proof connections thanks to screws with protective screw caps.


play equipment

Bridge combination

item number

028172500
<https://kaiser-kuehne.com/products/?lang=en>

product data

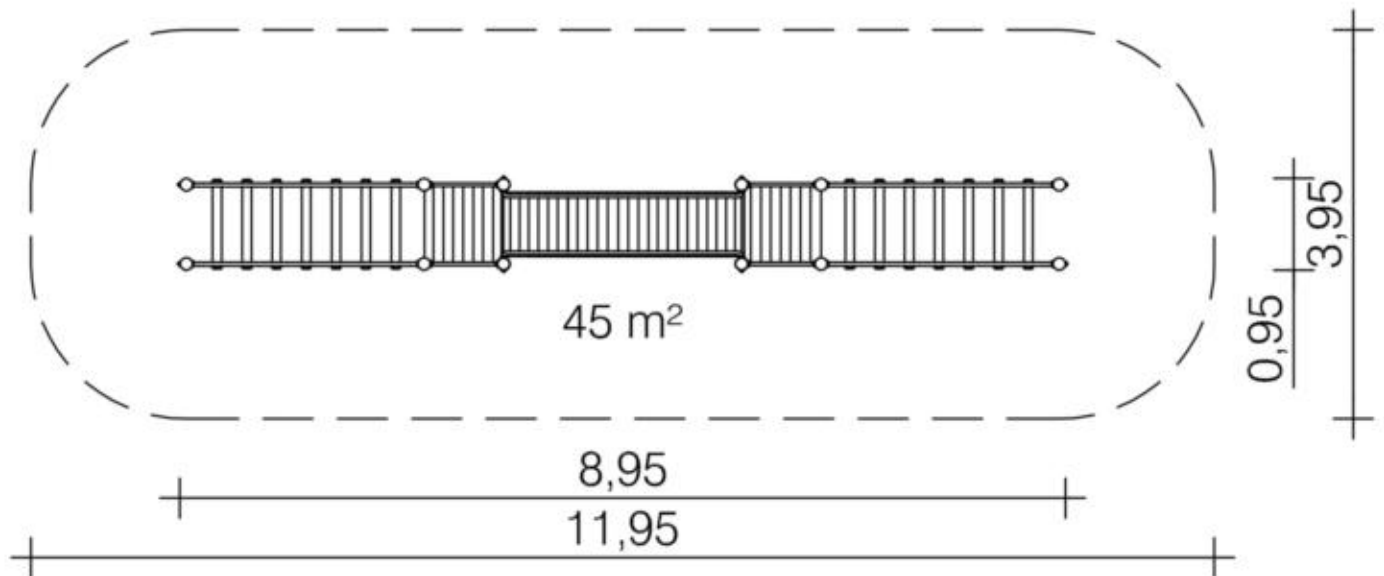

(without scale)

installation

play equipment [m]	l	8,95
	w	0,95
	h	2,55
minimum space [m]	l	11,95
	w	3,95
	h	2,55
impact area [m²]		45,00
free height of fall [m]		1,85
number of mechanics		2
assembly time [hrs]		5
lifting device		no
single weight [kg]		80
total weight [kg]		575

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,40	0,40	0,40	0,064	12
			0,768	12

usage

areas of use	public playgrounds	
activities	balancing	motion activity
age groups	4+	
number of users	13	
platform heights	1,40	
inclusion	Meeting opportunity	 Balancing 
	Altitude experience	 Coordination 
	Fumbling	

play equipment

Bridge combination

item number

028172500

variants

16926 *Classic*

