

play equipment

Water play structure

item number

034075702**product description** (page 1)Posts

Laminated Robinia timber Ø 120 mm with cylindrical milling. End-grain surfaces are covered by non-detachable protective stainless steel caps.

Stainless steel tubular pedestal for concrete-cast foundation and for fixed mounting to round Robinia posts, Ø 120 mm, below playing surface.

Attachment parts

- stainless steel support tube with twist protection, Ø 38 x 2,5 mm
- (cranked) climbing rungs from stainless steel tubes, Ø 33,7 x 2 mm

K&K Gargoyle

Welded stainless steel construction with a clamping device for tube Ø 38 mm, with receptacle for a water hose plug 1/2 in resp. 3/4 in (for instance Gardena® or similar type).

K&K Water storage basin

Base area: Ø 0,68 m

Welded stainless steel construction with two tubular run-offs, for post attachment. Conical rubber closing with locking mechanism for complete water extraction. Sheet metal thickness: 2 mm at least / tube Ø 33,7 mm.

K&K Water trough type M1 2,40 m

Welded stainless steel construction 0,80 m x 2,40 m, Sheet metal thickness: 2 mm at least / tube Ø 38 mm. For post attachment with inclined installation corresponding to water feed or water run-off. Sloped water run-off

K&K Water wheel

Welded stainless steel construction for post attachment, for water collection from a trough on top, 12 paddle wheels, rounded on the front end, framed by side panels. Sheet metal thickness: 2 mm at least. Water wheel mounted in roller bearing.

K&K Water trough type M1 1,60 m, 2 pieces

Welded stainless steel construction 0,80 m x 1,60 m, Sheet metal thickness: 2 mm at least / tube Ø 38 mm. For post attachment with inclined installation corresponding to water feed or water run-off. Inclined run-off, including flexible flap with

play equipment

Water play structure

item number

034075702**product description** (page 2)

stainless steel knob and reinforced rubber blade, clamping device for tube attachment Ø 38 mm

K&K Basin with one run-off for terracing installation

Base area: Ø 0,90 m

Total height: 0,14 m

Welded stainless steel construction for post attachment, with one discharge drilling, sheet metal thickness: 2 mm at least / tube Ø 38 mm

Metal components: stainless steel

Robinia timber is furnished with water-repellent, breathable protective coating. Besides protection from moisture, that treatment reduces crack formation. Thanks to a specific fastening adaptor, forces arising from the modular attachment parts are directly derived into the posts. Tamper-proof screw connections thanks to protective screw caps.


play equipment

item number

Water play structure

034075702
<https://kaiser-kuehne.com/products/?lang=en>

product data

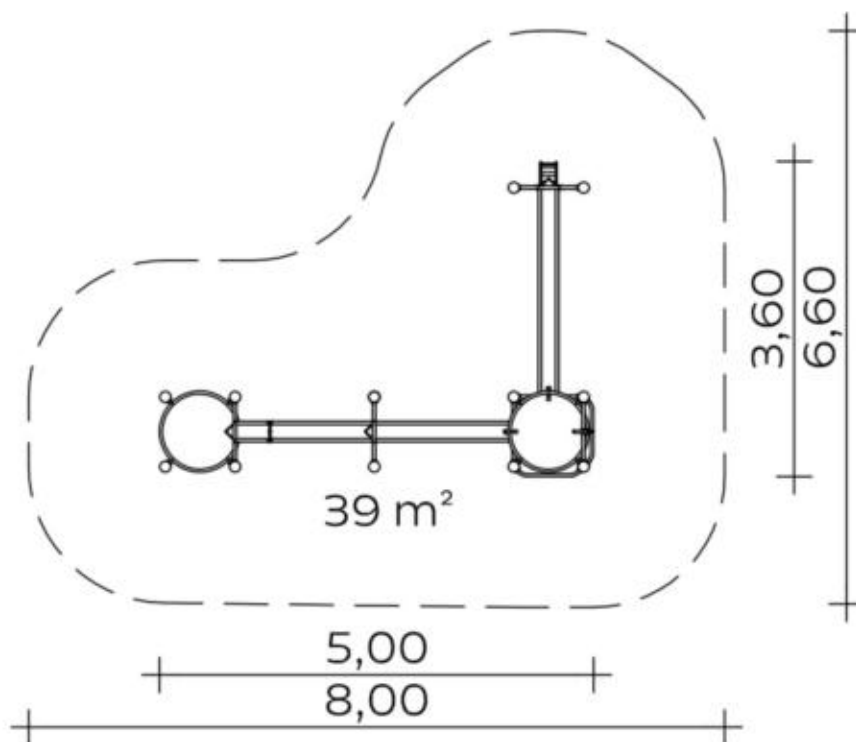

(without scale)

installation

play equipment [m]	l	5,00
	w	3,60
	h	1,70
minimum space [m]	l	8,00
	w	6,60
	h	1,70
impact area [m²]		39,00
free height of fall [m]		1,25
number of mechanics		2
assembly time [hrs]		3
lifting device		no
single weight [kg]		60
total weight [kg]		405

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,40	0,40	0,40	0,064	12
			0,768	12

usage

areas of use	supervised playgrounds
activities	manual activity
age groups	2+
number of users	19

inclusion

Meeting opportunity		Drama play	
Individual games		Exploratory game	
Fine motor skills		Feeling	
Group games		Fumbling	

play equipment

Water play structure

item number

034075702

variants

17073 *Classic*

