

play equipment

All Abilities Swing (2,50) stainless steel

item number

040366000**product description** (page 1)

- Swing support posts from stainless steel Ø 76,1 mm, wall thickness 2,9 mm; attachment to swing crossbeam by means of connector plates
- Swing crossbeam from stainless steel, Ø 88,9 mm, wall thickness 3,2 mm; attachment to swing supports by means of connector plates
- stainless steel swing axle with internal bearing axle from full material Ø 28 mm, external tube Ø 42,4 mm, wall thickness 2 mm and friction bearings
- trapezoid chain suspension consisting of stainless steel chains Ø 7 mm, with integrated roller bearing swivels preventing chain knotting, preset for upright sitting
- chain attachment to swing axle and swing seat by clamping adaptors made from stainless steel
- boat swing seat, certified according to EN 1176-1/-2, retaining persons with a reduced sense of balance, gripping ability or coordination, consisting of a cradle-shaped synthetic rubber mould facilitating impact absorbing zones and a reinforcing steel wire inlay from Ø 4 mm to prevent from rupture, circumferential frame made from a corrosion-resistant stainless steel tube of Ø 35 mm thickness, wall thickness 1,5 mm, with 4 attachment elements for chains of Ø 7 mm


play equipment

item number

All Abilities Swing (2,50) stainless steel

040366000
<https://kaiser-kuehne.com/products/?lang=en>

product data

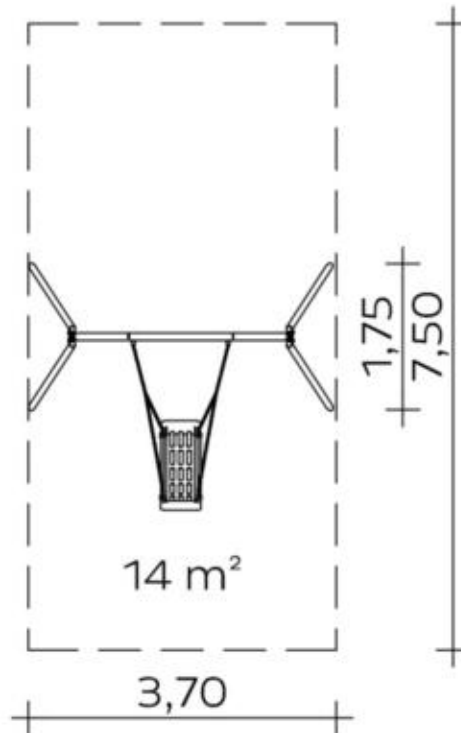

(without scale)

installation

play equipment [m]	l	1,75
	w	3,70
	h	2,71
minimum space [m]	l	7,51
	w	3,70
	h	2,71
impact area [m²]		14,00
free height of fall [m]		1,66
number of mechanics		2
assembly time [hrs]		2
lifting device		no
single weight [kg]		32
total weight [kg]		195

foundations

l [m]	w [m]	h [m]	vol [m³]	qty
0,60	0,60	0,47	0,169	4
			0,676	4

usage

areas of use	public playgrounds
activities	
age groups	3+
number of users	1

inclusion

Drama play	Individual games
Functional play	Speed
Balancing	Altitude experience
Coordination	

play equipment
item number

All Abilities Swing (2,50) stainless steel
040366000

variants

17285 *Classic*

