


Instructions for maintenance

We recommend, in addition to our instructions for maintenance, to consider carefully the demands of EN 1176-7

K&K **Water play** **structure on** **0-34075-702 tube pedestals**

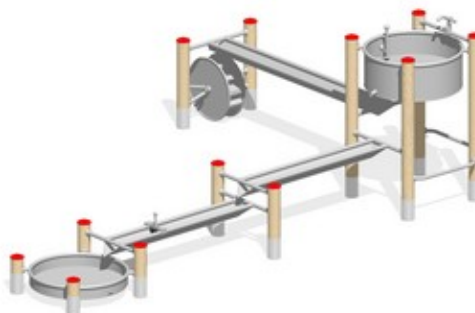

Please note:

Installation of the water pump to a pressure water pipe requires a K & K Valve combination (product no. 0 33190 000). In addition note the skeleton data specified in the installation instructions (distance, diameter of pipes, etc)



Check all screw connections; if necessary screw down again.

one-time only approx. 4-5 weeks after installation

Recommendations about regular maintenance

	1 x weekly	2 x monthly	1 x monthly	4 x yearly	2 x yearly	1 x yearly
 Check connection between Robinia post and steel pedestals, screw down bolts if necessary, replace Robinia post if necessary	☐	☐	☐	☐	☒	☐
 Check cleanliness of play- and safety area, take out alien elements	☐	☐	☒	☐	☐	☐
 Check stability of vertical posts, tighten bolt-connections if necessary	☐	☐	☐	☐	☒	☐
 Check other component elements for wear and tight connections, tighten connections and replace defective elements if necessary	☐	☐	☐	☐	☒	☐
 Check bearings and/or joints for tight fixing and easy-runningfunction, replace and grease if necessary	☐	☐	☐	☐	☒	☐
 Check rubber parts like seats, hoses, collars etc. for wear, replace if necessary	☐	☐	☒	☐	☐	☐
 Check foundation, foundation anchoring and whole construction for corrosion or decay, repair or replace if	☐	☐	☐	☐	☐	☒

necessary.

Please note: The mentioned maintenance intervals are a recommendation only. They have to be adjusted to the needs and circumstances of a certain playground (e.g. due to the frequency of use, social facilities and vandalism problems etc.)